

图片仅供参考,请以实物为准。本公司保留对产品外观及技术改进的权利,恕不另行通知。
Picture is only for reference, please subject to our available product. We reserve the right to revise product technical parameter without notice.

RONSE LIGHTING



New
RONSE LIGHTING
our sunshine
2018 CATALOGUE

佛山市荣仕照明科技有限公司 Foshan Ronse Lighting Technology Co.,Ltd.

地址:中国广东省佛山市南海区丹灶镇金沙联沙工业区

Add: Liansha Industrial Zone ,Jinsha,Danzao Town, Nanhai, Foshan, Guangdong, China.

电话(Tel) : +86-757-86609111 86609919

传真(Fax): +86-757-86616106

Http://www.ronse.cc

E-mail: info@ronse.cc; rs@ronse.cc



企业官网

2018 CATALOGUE

荣仕照明®
RONSE our sunshine

ABOUT US

关于我们

RONSE



佛山市荣仕照明科技有限公司是一家致力于LED应用照明产品研发、生产、销售及服务的专业型照明企业，座落于珠三角经济重镇广东省佛山市南海区丹灶镇，毗邻广州、香港等国际化前沿城市，交通极为便利；公司具有悠久的发展历史，在LED应用照明产品的开发和市场的开拓方面积累丰富的经验，并于2015年被有关部门认定为国家级高新技术企业。

荣仕照明经过多年的发展，现已发展成为具有一定规模的专业照明企业，厂区占地面积超过30000多平方米，公司引进了具有国际先进水平的生产加工设备、数控自动加工设备，自动喷漆设备，以及专业的光电检测及老化设备，同时拥有专业的LED应用照明产品的研发、设计团队，生产管理团队以及销售团队，严格实行ISO9001:2000国际质量管理体系标准，产品先后通过了CE、RoHS、TUV、CCC等多项国际国内认证，并获得多项专利。

作为专业的LED应用照明产品制造商，“荣仕照明”多年一直致力开发出深受消费者喜爱的照明产品，产品主要包括：LED投射灯、LED天花灯、LED筒灯、LED格栅灯、LED吊线灯以及LED球泡灯等多个种类产品，涵盖LED大功率，LED贴片，COB等多个系列。

荣仕照明以“安全节能、绿色环保”为核心，秉承“热情诚信，科技创新”的经营理念，不断追求产品的美观性和实用性，凭借优质的产品和完善的售后服务，产品畅销海内外数十个国家和地区，赢得了广大客户的信赖和好评。

面向未来，我们持续探索，不断超越.....

Foshan Ronse Lighting Technology Co.,Ltd. is a National high-tech enterprises of R&D,Manufacturing ,Marketing and Services in LED application lighting products, located in Danzao Town,Nanhai,Foshan ,Guangdong-, as a professional manufacturer with a long history, our company has accumulated rich experience in research and development and marketing in this burgeoning led application lighting industry .

After many years' development, Ronse Lighting has developed to be one of professional manufacturers for led lighting products, and own Workshop Area more than 30,000 M² , we adopt advanced processing equipments, automatic CNC processing equipments , automatic paint spraying apparatus and testing equipment; own professional and veteran team in R&D,, management and sales, we Strictly implement ISO9001:2000 international quality management system standard, all of our products have passed CE, RoHS,TUV,CCC certificate, and own several patents.

Main products of Ronse Lighting include: led spot light , led ceiling light , led down light , led grille light , led pendant light and led bulbs etc. are including Several series of products like high power LED, SMD ,COB etc.

“safe and energy-saving, Green and environment friendly” is our design concept, “Enthusiasm and Honest, Technological innovation” is our management philosophy , we always pursue more beautiful and practical products , With excellent quality and best after-sales service , our products have been sell very well in many countries , and Won trust and high praise from our customers.

Looking to the future, we will continue to explore, constantly beyond, with somebody like you from all over world.

研究与开发 RESEARCH AND DEVELOPMENT

产品和技术创新作为企业创新的核心内容，孜孜不倦的追求；将产品研发与技术研发合为一体，同时兼顾客户的需求和市场的可行性，争取在商业上，产品创新上都取得成功。

Products and technological innovation is the core of the enterprise innovation, is the tireless pursuit; integrating product and technology development into a whole, meanwhile, both the requirements of customers and the market feasibility are considered to obtain success in business and product innovation.



企业荣誉/产品认证


Enterprise honor/Product certification

一项荣誉,代表一种追求,体现一种成效,象征一种能力,催生一种动力.

一项认证,承载一份热情,表示一份认可,支撑一份理念,享誉一份成果.

An honor, represents a kind of pursuit, reflects a kind of effect, symbolizes a kind of ability, hastens a kind of motivation.

An authentication, carries a passion, expresses a recognition, supports a concept and enjoys a result.

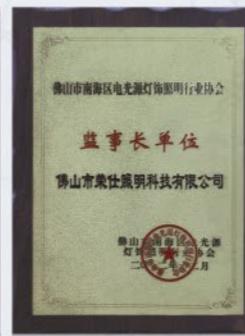

RoHS认证

SAA认证

CE认证



CCC认证

专利证书/Letters Patent

TUV认证

高新技术企业



优质制造商



全光谱 Full spect


全光谱指的是光谱中包含紫外光、可见光、红外光的光谱曲线，并且在可见光部分中红绿蓝的比例与阳光近似，显色指数接近于1的光谱。
The full spectrum refers to the spectrum of ultraviolet, visible, and infrared light in the spectrum, and the ratio of red, green, and blue in the visible portion is similar to that of sunlight, and the color rendering index is close to that of 1.

显指 Ra


显指指数有十五种颜色，取前8种常见的显指指数的平均值，记为Ra，表征此光源显色性，其名称有
There are fifteen colors in the index index. The average of the first eight common color rendering indexes is recorded as Ra, which characterizes the color rendering of the light source.

R1: 淡灰红色	R2: 暗灰黄色	R3: 饱和黄绿色	R1: Light gray red	R2: Dark gray yellow	R3: Saturated yellow green
R4: 中等黄绿色	R5: 淡蓝绿色	R6: 淡蓝色	R4: Medium yellow green	R5: Light blue green	R6: Light blue
R7: 淡紫蓝色	R8: 淡红紫色	R9: 饱和红色	R7: Light purple blue	R8: Light red purple	R9: Saturated red
R10: 饱和黄色	R11: 饱和绿色	R12: 饱和蓝色	R10: Saturated yellow	R11: Saturated green	R12: Saturated blue
R13: 白色人肤色	R14: 树叶绿	R15: 黄种人肤色	R13: White human skin color	R14: Leaf green	R15: Yellow color

原来生活可以更美的 | IT TURNS OUT THAT LIFE CAN BE MORE BEAUTIFUL.
还原自然之光 | RESTORE THE LIGHT OF NATURE

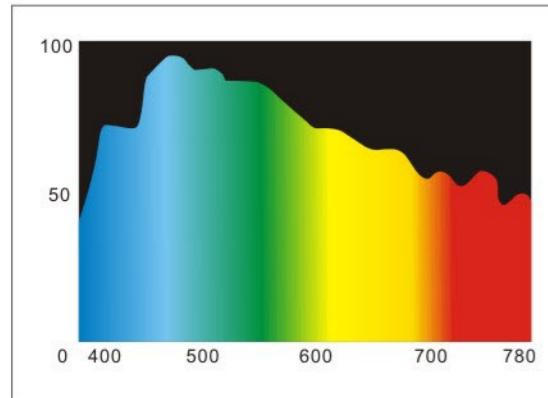

显色指数 > 90
色彩更鲜艳更直接
Color rendering index > 90
Brighter colors and more direct

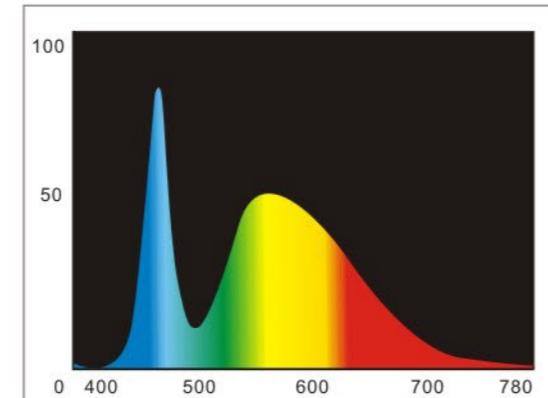

显色指数 > 80
色彩普通
Color rendering index > 80
Ordinary color



让色彩愈加真实

显色指数高达 $Ra \geq 90$ 是更接近板照物体的自然色

TIPS: 显色指数: 光源对照物体还原真实颜色的能力参数












提高生理欲望/Improve physical desire



提高产品购买欲望/Increase product purchase desire


全光谱细分照明应用 Full spectrum subdivision lighting application

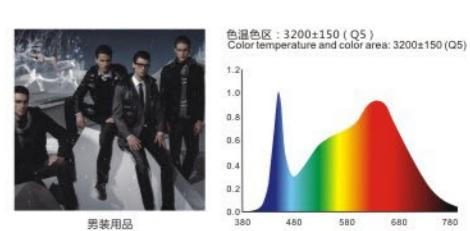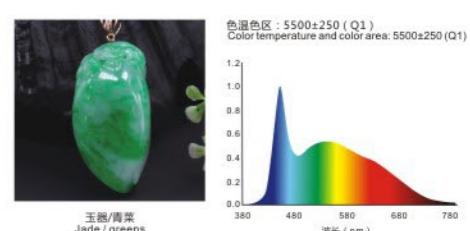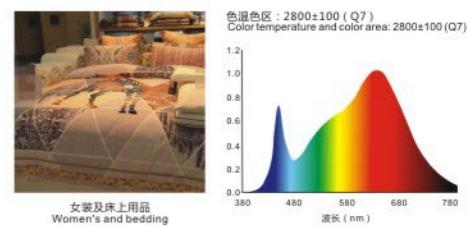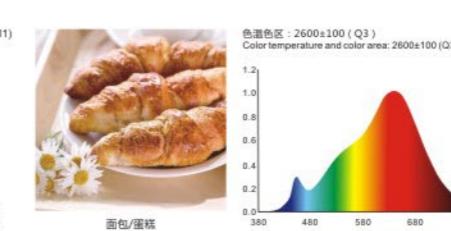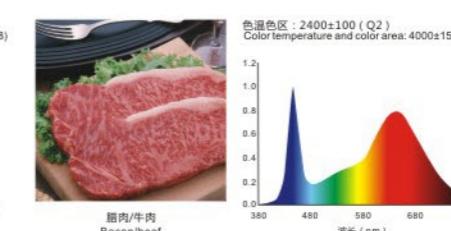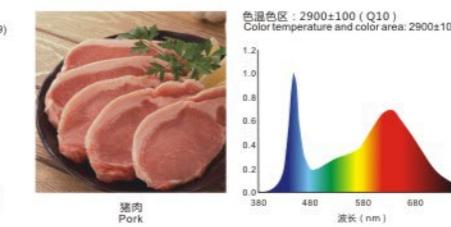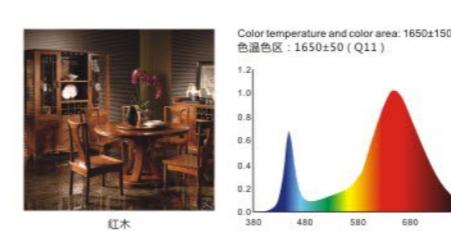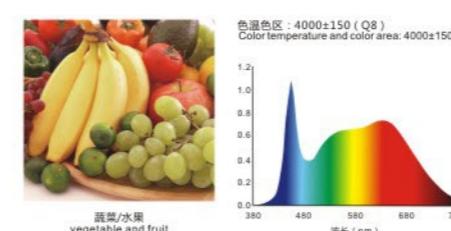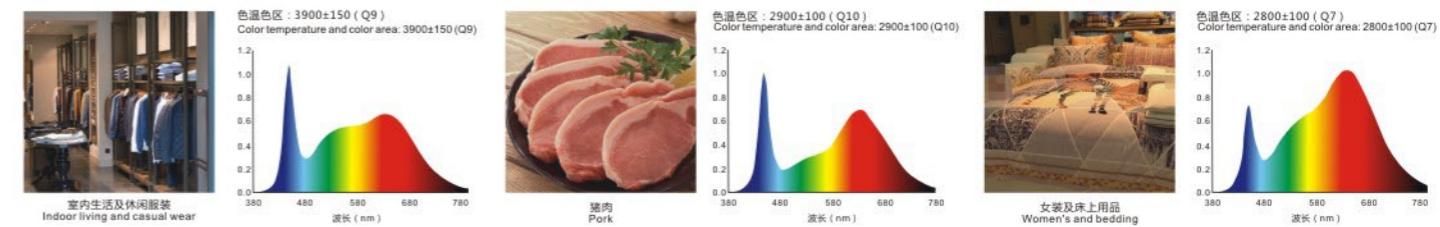

Make colors more realistic

The color rendering index as high as $Ra \geq 90$ is closer to the natural color of the object

TIPS: color rendering index: the ability parameter of the light source to restore the true color against the object

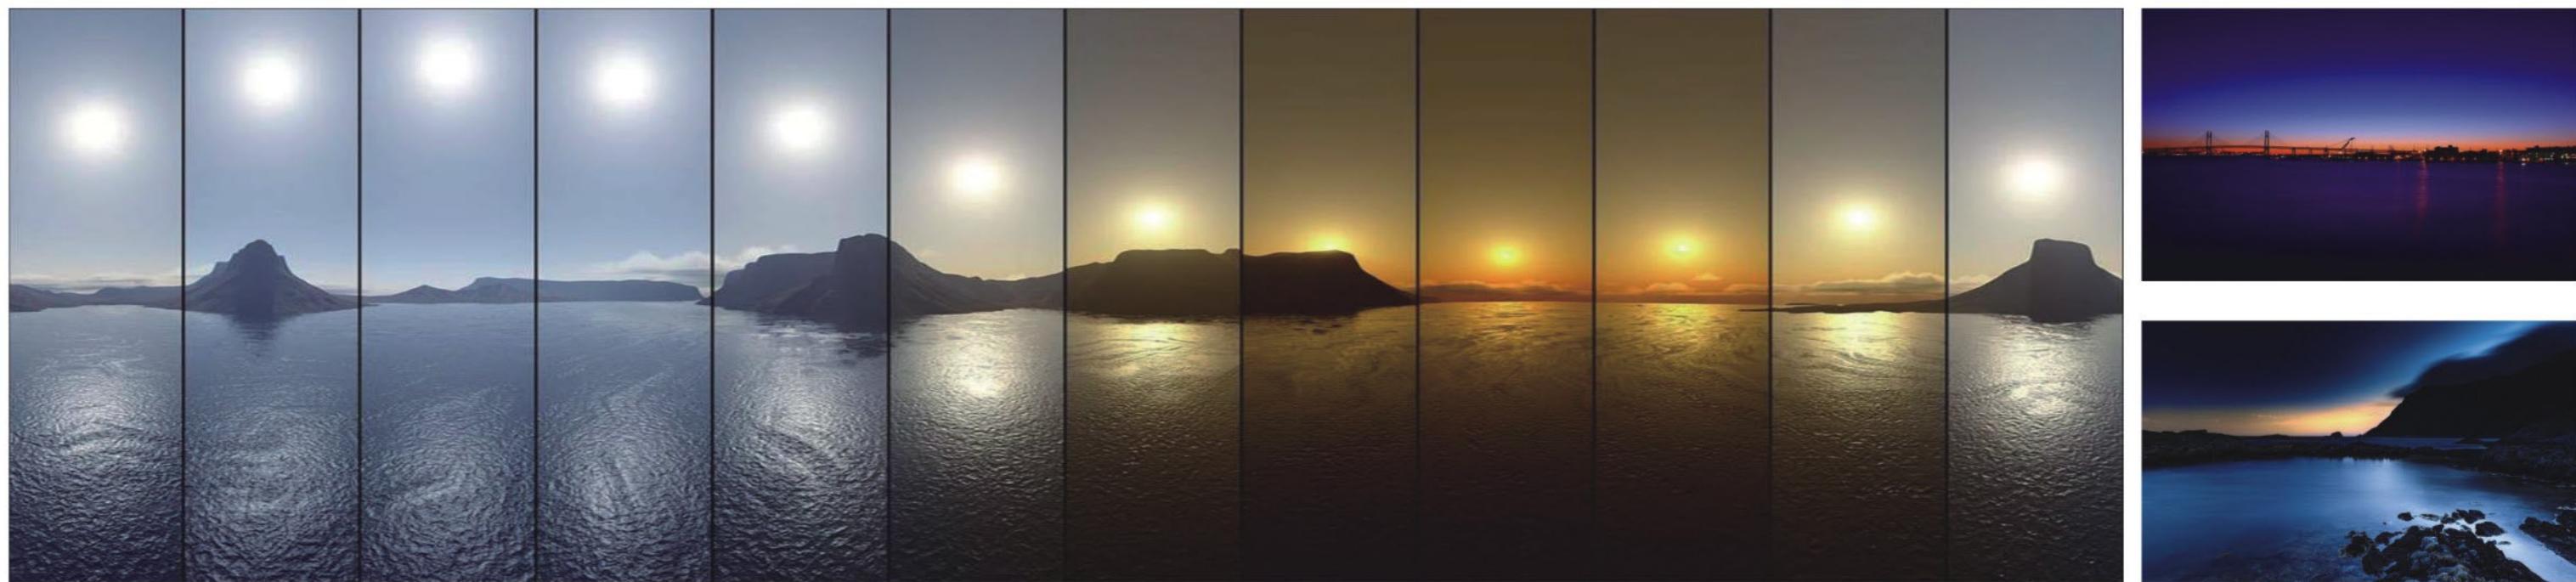

优秀的光色一致性和连续性


Excellent light color consistency and continuity

85 degrees BIN, 2 step partition of color, achieving excellent light color consistency and continuity.

85 degrees, 105 degrees, more than 6000 hours of luminous flux maintenance, ensure 90% of optic retention @ 30000 small after continuous work chromaticity retention test.

85度BIN，2级分色，
实现出色的光色一致性
和连续性。

85度，105度，超过6000小时的光通量维持，确保90%的光学保留@ 30000小时后连续工作色度保持试验。

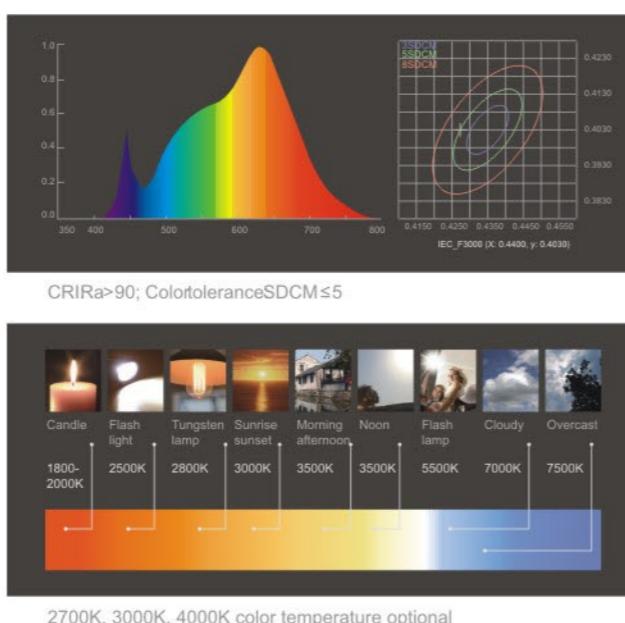

荣仕照明使用高级光学系统


RONSE lighting use advanced Optical system

RONSE lighting lamps used the optical system with independent intellectual property rights. International leading black anti glare technology, hidden light source, best treatment of beam angle, shading angle and light interception angle. Achieve ultra small angle lighting without glare, UGR < 0, truly realize "Nothing but light", small angle lamp UGR is less than 5, medium angle lamp UGR is less than 10. Precise control, round light spot, uniform transition, natural halo, clear edge, better control for side spot and realize the illumination distance, illumination area, spot effect and quality.

荣仕照明灯使用光学有独立知识分子的制度财产权。国际领先的黑色防眩光技术，隐藏光源，最好的光束角度处理，阴影处理角度和光线截取角度。无需实现超小角度照明眩光，UGR < 0，真正意识到“只有光明”，小角灯UGR较少比5，中角灯UGR更小比10。精确控制，圆形光斑，均匀过渡，自然光环，清晰边缘，更好地控制侧斑和实现照明距离，照明区域，现场效应和质量，

which greatly improves the visual comfort. controllable weakening, eliminating the vice spot, optimize the main spot, natural original optical structure with light intensity transition, has applied for new and invention patent "a small angle lens"



这大大改善了视觉效果安慰。
可控弱化，消除副点，优化主要点，自然原始光学结构光强度过渡，已应用新的和发明专利“小角度透镜”

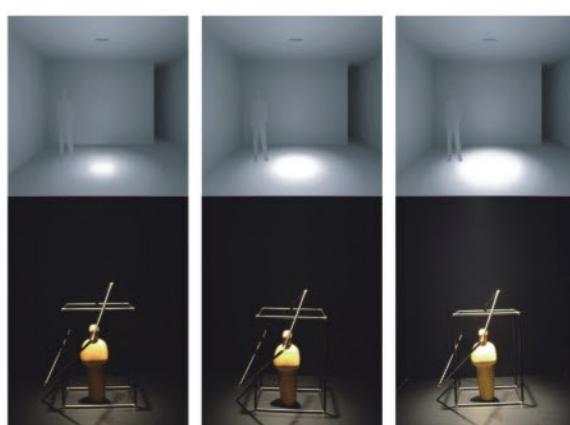

ADVANCED OPTICAL TECHNOLOGY 先进的光学技术


产品采用世界顶尖的光学技术来研发，并用科学、严谨的工艺来生产以保证卓越的光学性能。采用TIR透镜以精确控制出光角度和光斑。光斑干净、光分布均匀，无暗区、无杂光等不良缺陷。具有精确的配光和高效的光输出，出光柔和、均匀、干净，没有暗区或光环。

Developed by adopting world top class optics technology and processed in scientific and strict techniques to guarantee the optical quality of this series TIR lens used in products can make the beam angle precisely with clean and even light spot without dark area, stray light and other defects. And the products are with precise lighting distribution and high efficient output, soft, even and clean light without dark area or halo.

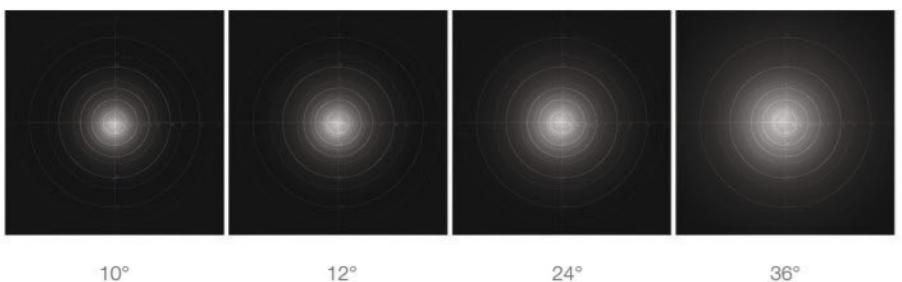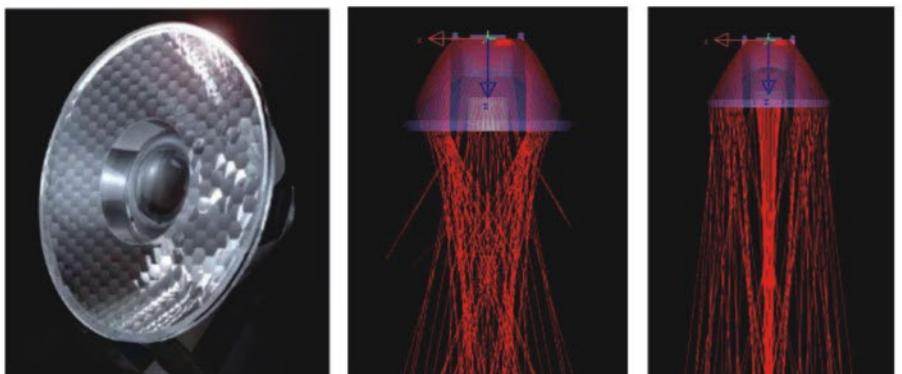


最新的高品质自由曲面反光杯，光斑均匀，无黄圈，无眩光。

The latest high quality free surface reflective cup, uniform light, no yellow ring, no glare.

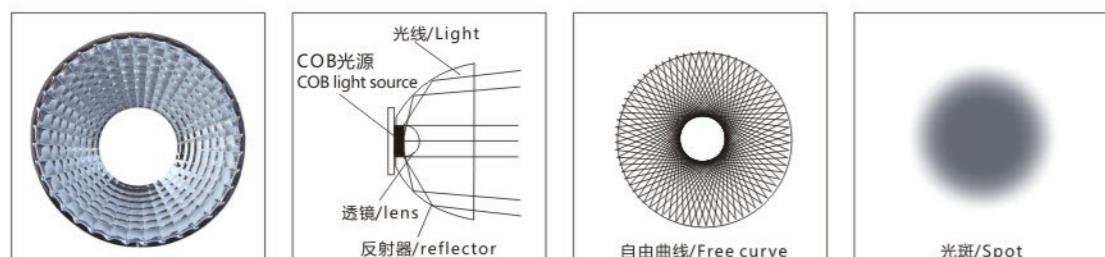

反射器的凸面镜表面经过精心设计，能产生微型反射光，在不降低光学性能的前提下改善光分布，从而提高灯具效率。可以选用可互换式反射器改变光束，包括在射灯已经安装的情况下。

The convex mirror reflector surface is carefully designed, can produce micro reflection, on the premise of no reducing optical performance to improve the light distribution, so as to improve the efficiency of lamps. It can choose Interchangeable reflector to change beam, including in the case of the spotlight being installed.

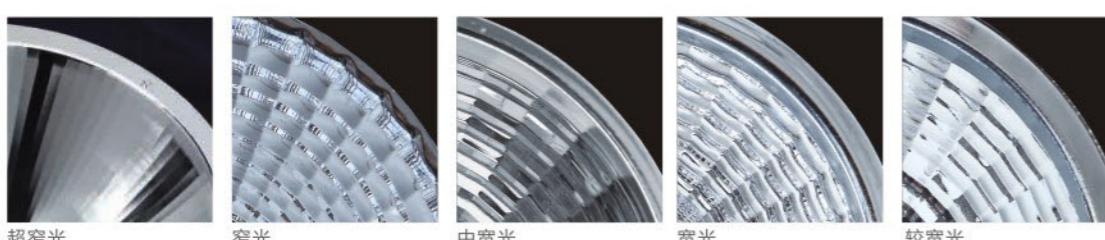

THE DESIGN OF RADIATOR 散热设计

解决散热问题，是LED照明产品工作稳定的核心内容：芯片的工作结温控制不好，会出现光衰大、色温偏移、寿命短等不良后果。专业散热结构设计，为空气对流提供更大的空间。

How to deal with the problem about the radiator, it is the core content which can help the led product working more stable. If the led chips had been working under high temperature, it would cause the problem about the large light fades, unstable color temperature, and short lifetime of chips. The professional design of radiator can provide more space for air convection to decrease the product temperature.

- 优质的材料选择

根据不同的材料特性及应用需求，选用优质的散热材料。

- 良好的加工工艺


采用特殊的加工工艺，使LED芯片与散热器紧密结合在一起，确保散热器的导热发挥最大效能。

- The selection of high quality material

Depending on the different characteristic and the requirements of the application, it will help us to choose the high quality material of heat sink.

- High quality of the producing technology

With the special producing technology, the LED chips will combine with the radiator closely, so that it can make sure the function of radiator play the biggest role in the product.

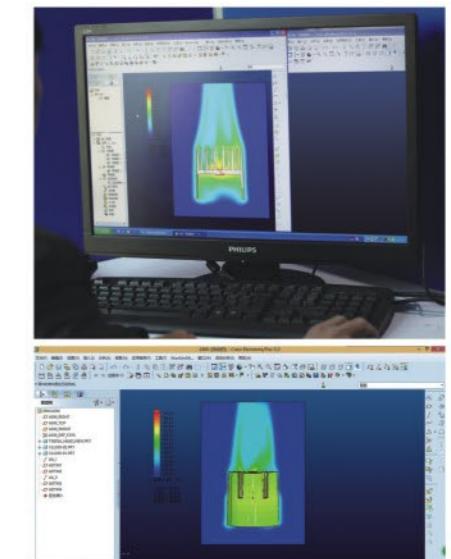

DRIVER 驱动电源

- 控制IC

- 电解电容

- 合理的驱动电路设计

驱动电源的质量和匹配性起决定性作用。公司通过合理的驱动电路设计，关键元器件采用进口的性能稳定、质量可靠的IC、电解电容，确保驱动电源的参数和寿命都与LED光源相匹配，平均寿命设定30000小时，保用3年。

- control of IC

- Electrolytic & capacitors

- suitable design of driver circuit

The quality and matching of drive power play a decisive role.

We are relying on using the reliable quality and stable performance key accessories to make sure the data and service life suitable for the LED light source. The average lifespan is set as 3000h, and the warranty is 3 years.



Intelligent lighting Manufacturer

精益求精的专业态度，

融汇现代精工科技成果。

荣仕照明在专业的领域，展现夺目的美学光

辉诠释高端品质产品的奥妙，引领布光新思维！

战略合作伙伴 Strategic Partners

LIGHT SOURCE SUPPLIER/光源供应商

CITIZEN



CREE



LED DRIVER SUPPLIER/驱动电源供应商

KGP



TRIDONIC



AI Dimming®

OPTICAL SUPPLIER/光学供应商

DARKOO™ 达尔科

一为控光而生

GROPTICS

格锐智造·光学

HERCULUX

恒坤光电

ZY

正亮光学

OSYS

欧盛光学

TRACK RAIL SUPPLIER/路轨供应商

POWERGEAR®

LED线条导轨灯系列 LED LINEAR TRACK LIGHT SERIES



GD18B15C P 007 GD18B20D P 009 GD18B26CD P 011 GD18B15C-Z P 013 GD18B15E-Z P 015 GD18B20D-Z P 017 GD18B50C P 019 GD18B40S P 021

LED调焦导轨灯系列 LED TRACK LIGHT ANGLE ADJUSTBALE SERIES



GD16P10A P 027 RS-2298A P 029 RS-2298B P 031 RS-2298C P 033

LED导轨灯系列 LED TRACK LIGHT SERIES



GD18A10C P 035 GD18C10A P 037 GD18H30A P 039 GD17J30C P 041 GD17K30B P 043 GD17K30A P 045 GD16H40C P 047 GD16R30A P 051



GD17L10B P 053 GD17L10A P 055 GD18R15A P 059 GD16S10B P 061 GD16S10A P 064 GD16J30A P 067 GD16G40C P 069 GD16H30A P 071



GD16H40A P 073 GD16H40B P 073 GD16M30A P 075 GD16C10A P 077 GD16B30A P 079 GD16B30C P 079 GD16B50C P 079 GD02F30A P 081



GD16D70A P 083

LED天花灯系列 LED CEILING LIGHT SERIES



TH01F05C P 087 TH01B03C P 089

LED筒灯系列 LED DOWNLIGHT SERIES



TD04M24C P 095 TD04K15C P 097 TD25C05S P 099

LED射灯系列 LED SPOT LIGHT SERIES



WL18B12D P 105 RS-18B12A P 105 RS-2117A P 107 WL18C15A P 109 WL18C30B P 109 WL01C07C P 109 WL18B12B P 111 WL18B12C P 111



WL18B24D P 111 WL18A10A P 113

LED象鼻灯系列 LED SPOT LIGHT SERIES



RS-T610C P 117 RS-2120-1 P 119 RS-2120-2 P 119 RS-T107C P 121

LED格栅射灯系列 LED GRILLE LIGHT SERIES



RS-2114G-1 P 125 RS-2114G-2 P 125 RS-2114F-1 P 127 RS-2114F-2 P 127 RS-2106-1(C) P 129 RS-2106-2(C) P 129 RS-2106-3(C) P 129 RS-2115C P 131

LED明装筒灯系列 LED SURFACE MOUNTED DOWNLIGHT SERIES



RS-2605A P 135 RS-2606A P 137

LED吊线灯系列 LED HANGING LIGHT SERIES




RS-2630CD P 141 RS-2315C P 143 RS-2330CD P 145 RS-2351 P 147 RS-2341 P 149 RS-2305A P 151 RS-2306A P 153 RS-2318 P 155




DALI 调光 DALI是（Digital Addressable Lighting Interface的英文缩写）数字可寻址照明接口技术。是一个数据传输协议，DALI定义了照明电器与系统设备控制器之间的数字通信方式，DALI不是一种新的总线，但支持开放式系统。设计应用DALI最初目标是为了优化一个智能型的灯光控制系统，该系统具备结构简单，安装方便，操作容易，功能良优，不仅可用于一个房间内的灯光控制，还可以与大楼管理系统（BMS）对接。DALI系统与BMS，EIB或LON总线系统不同，不是将它扩展成具有各种复杂控制功能的系统，而仅仅是作为一个灯光控制子系统应用，通过网关接口集成于BMS中，可接受BMS控制命令，或回收子系统的运行状态参数。它可以单点控制，但是布线相对来说有些复杂，成本相对高些。

DALI dimming DALI is the digital addressable lighting interface technology (English abbreviation for Digital Addressable Lighting Interface). Is a data transmission protocol, DALI defines the digital communication between lighting appliances and system equipment controllers, DALI is not a new bus, but supports open systems. The first goal of the design application DALI was to optimize an intelligent lighting control system with simple structure, easy installation, easy operation and excellent functions. It can be used not only for lighting control in a room, but also with the building management system (BMS).) docking. Unlike the BMS, EIB or LON bus system, the DALI system is not extended to a system with various complex control functions, but only as a lighting control subsystem application, integrated into the BMS through the gateway interface, and can accept BMS control commands. , or recycle the operating state parameters of the subsystem. It can be controlled at a single point, but the wiring is relatively complicated and relatively expensive.


DALI 接线图 / DALI Wiring Diagram

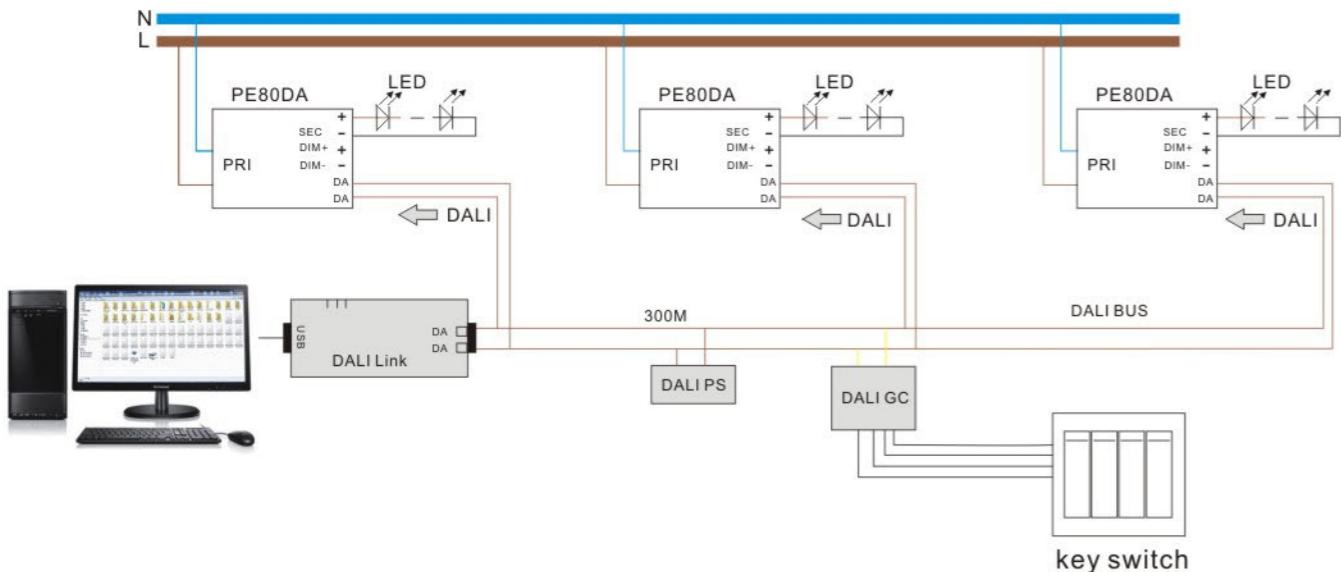

1回路 DALI轨道系统
1 Circuits DALI Track System

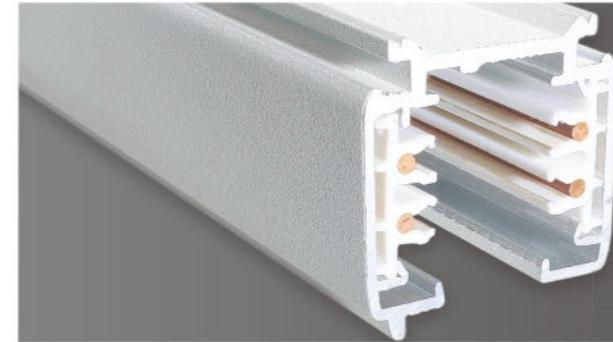

3回路 DALI轨道系统
3 Circuits DALI Track System

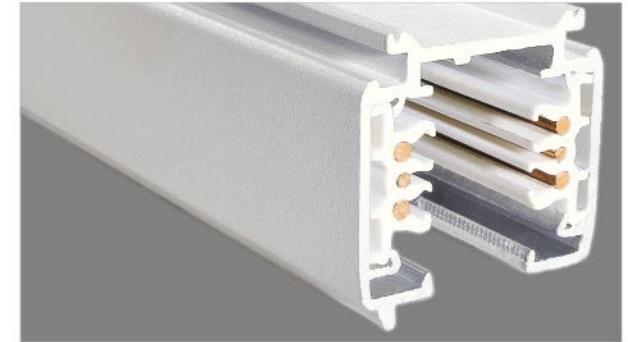



Intelligent DALI power feed integrated with wireless DALI control. The DALI track system can be controlled by iPhone or iPad Apps that we developed in-house via Bluetooth connection.

POWERGEAR


王牌路轨三回路轨道接头可完全兼容上述品牌的路轨
真正的一件通用！

POWERGEAR Triple circuit track joints are fully compatible with the above brands
The real one is universal!


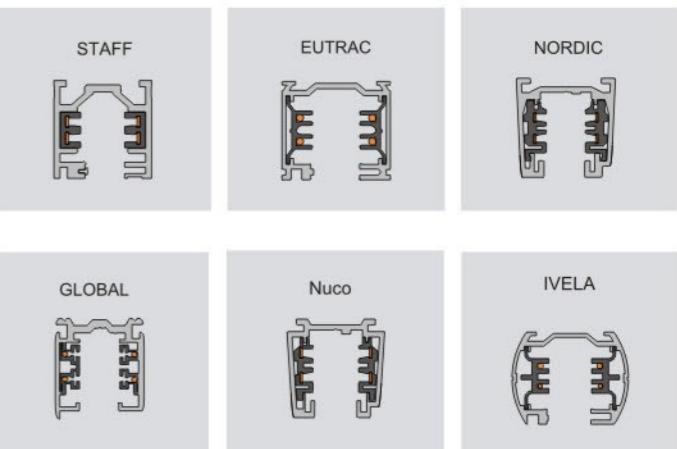


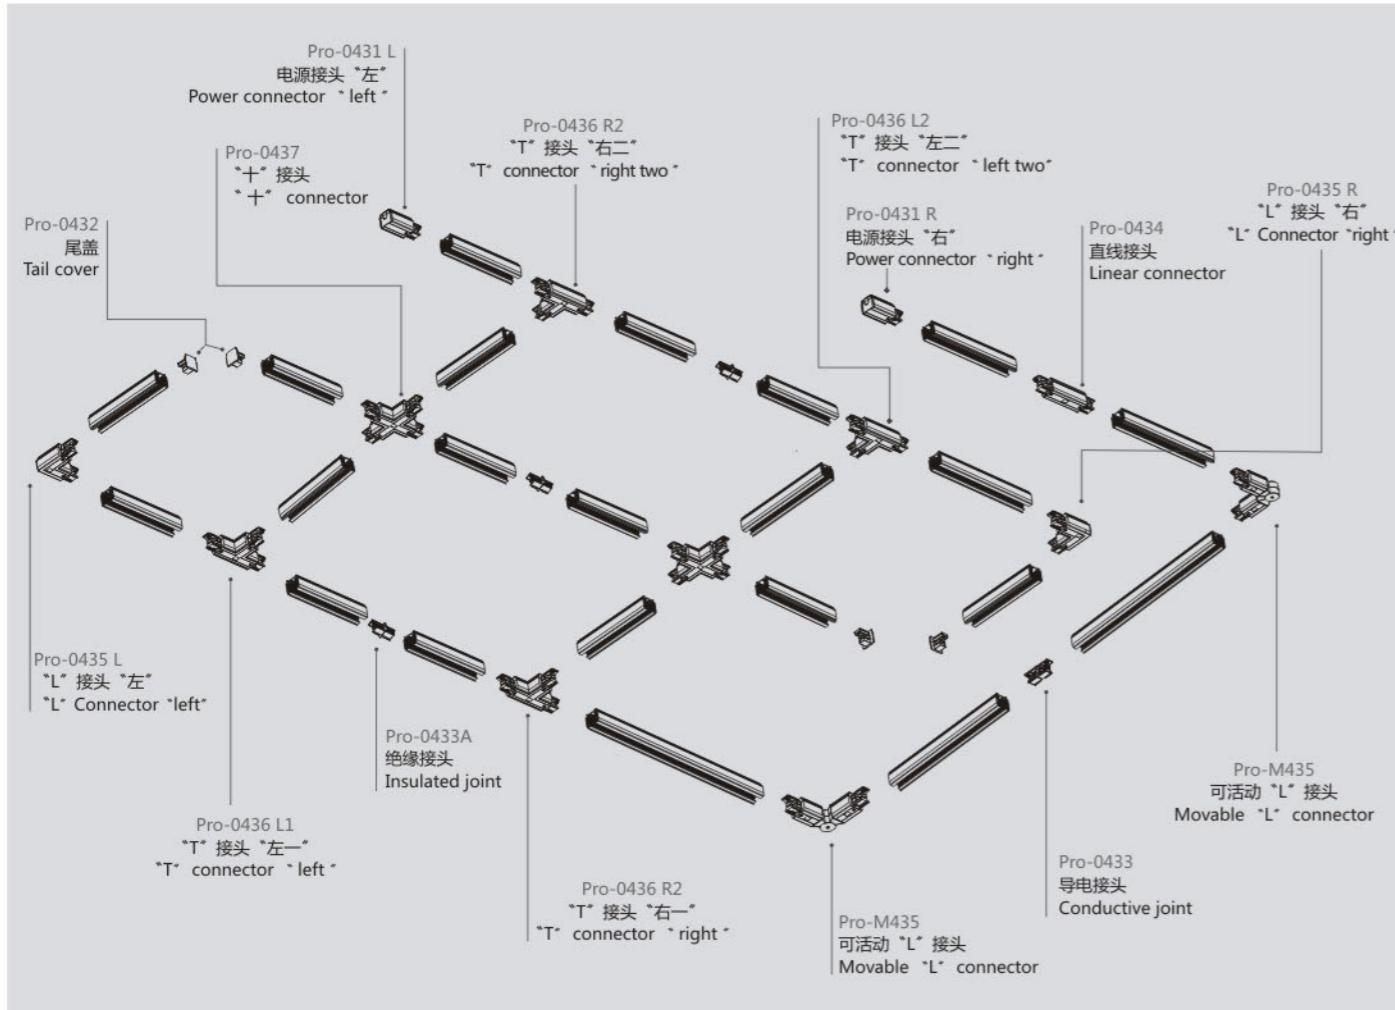

M436L(L1可转向L2)
M436L (L1 can be turned to L2)

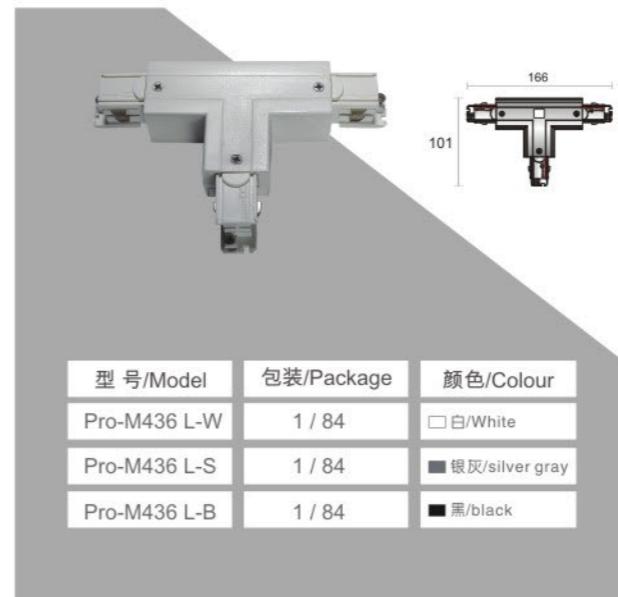

M436R(R1可转向R2)
M436R (R1 can be turned to R2)

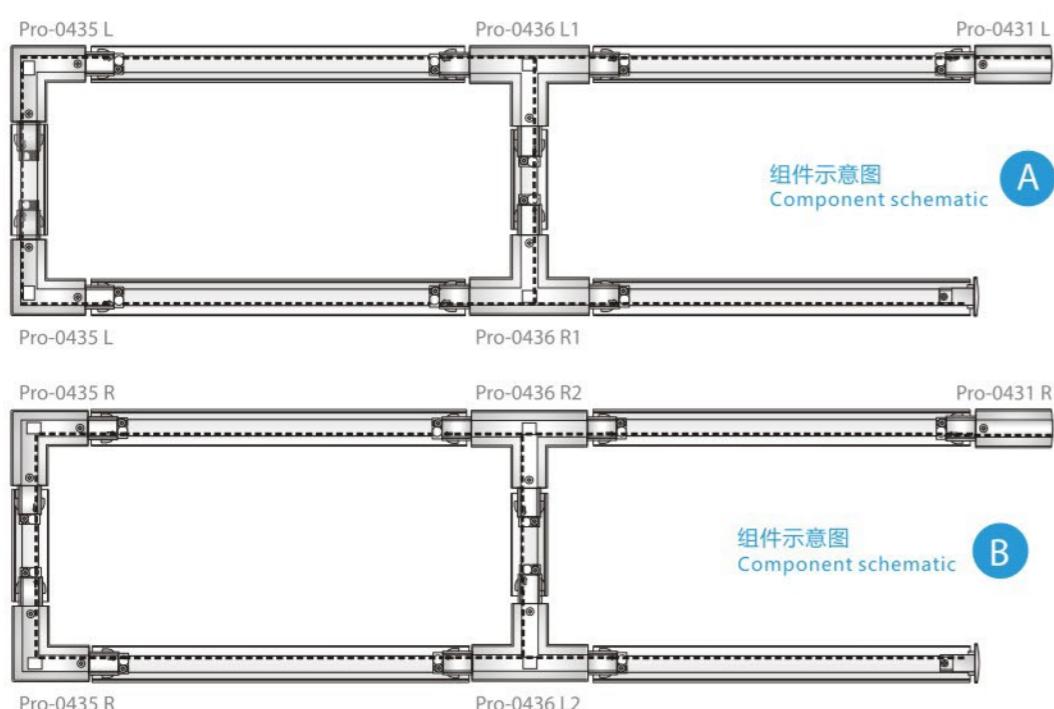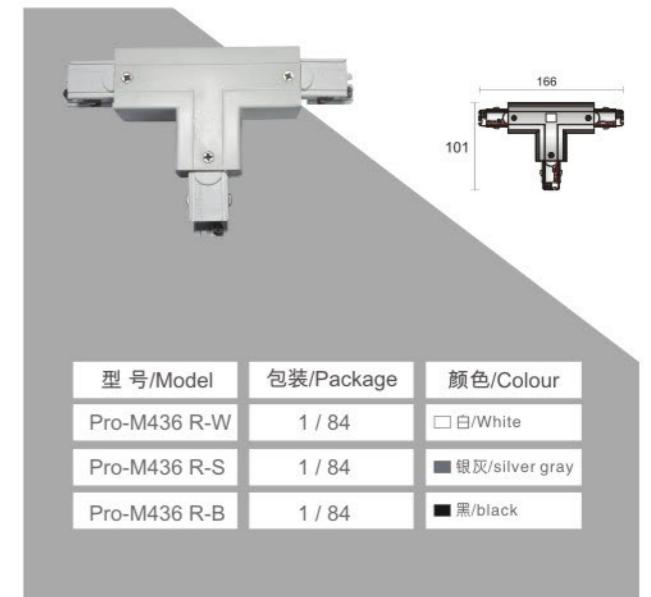

组件示意图
Component schematic A

组件示意图
Component schematic B


天花悬吊易力夹套组 (带6mm X 1m杆)
Ceiling Suspension Easy Jacket Set (with 6mm X 1m rod)



天花悬吊易力夹套件 (带1.5mm钢线)
Ceiling Suspension Easy Clip Kit (with 1.5mm steel wire)



天花 T-Bar 悬吊快装夹件 Ceiling T-Bar Suspension Clips




型号/Model	包装/Package	颜色/Colour
Pro-M146T-W	1 / 500	<input type="checkbox"/> 白/White
Pro-M146T-S	1 / 500	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-M146T-B	1 / 500	<input checked="" type="checkbox"/> 黑/black

吊件安装说明 Hanging installation instructions


1 调整好易力夹套件方向，把易力夹套件垂直装入顶板挂件中，最后右旋易力夹固定易力夹套件（如图所示）
Adjust the direction of the Easy Clip Kit and put the Easy Clip Kit Vertically loaded into the top plate pendant, and finally right-handed easy clamp Fixed easy clamp kit (as shown)



2 调整好易力夹套件方向，把轨道垂直转入易力夹套件内,最后左旋易力夹固定轨道（如图所示）
Adjust the direction of the Easy Clip Kit and turn the track vertically In the easy clamp kit, the last left-handed easy clamp fixed track (as the picture shows)

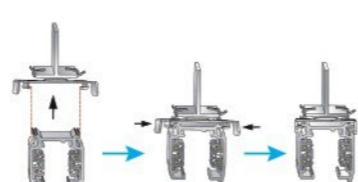

软接头 Soft joint



35 248

型号/Model	包装/Package	颜色/Colour
Pro-2439-W	1 / 119	<input type="checkbox"/> 白/White
Pro-2439-S	1 / 119	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2439-B	1 / 119	<input checked="" type="checkbox"/> 黑/black

“十”接头 “+” connector



166
166

型号/Model	包装/Package	颜色/Colour
Pro-2437-W	1 / 60	<input type="checkbox"/> 白/White
Pro-2437-S	1 / 60	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2437-B	1 / 60	<input checked="" type="checkbox"/> 黑/black

“T”接头“左一” “T” connector “Left one”



166
101

型号/Model	包装/Package	颜色/Colour
Pro-2436 L1-W	1 / 84	<input type="checkbox"/> 白/White
Pro-2436 L1-S	1 / 84	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2436 L1-B	1 / 84	<input checked="" type="checkbox"/> 黑/black

“T”接头“左二” “T” connector “Left two”



166
101

型号/Model	包装/Package	颜色/Colour
Pro-2436 L2-W	1 / 84	<input type="checkbox"/> 白/White
Pro-2436 L2-S	1 / 84	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2436 L2-B	1 / 84	<input checked="" type="checkbox"/> 黑/black

“T”接头“右一” “T” connector “Right one”



166
101

型号/Model	包装/Package	颜色/Colour
Pro-2436 R1-W	1 / 84	<input type="checkbox"/> 白/White
Pro-2436 R1-S	1 / 84	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2436 R1-B	1 / 84	<input checked="" type="checkbox"/> 黑/black

“T”接头“右二” “T” connector “Right two”



166
101

型号/Model	包装/Package	颜色/Colour
Pro-2436 R2-W	1 / 84	<input type="checkbox"/> 白/White
Pro-2436 R2-S	1 / 84	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2436 R2-B	1 / 84	<input checked="" type="checkbox"/> 黑/black

直线接头 Linear connector



166
35

型号/Model	包装/Package	颜色/Colour
Pro-2434-W	1 / 165	<input type="checkbox"/> 白/White
Pro-2434-S	1 / 165	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2434-B	1 / 165	<input checked="" type="checkbox"/> 黑/black

尾盖 Tail cover



31
35

型号/Model	包装/Package	颜色/Colour
Pro-0432-W	1 / 500	<input type="checkbox"/> 白/White
Pro-0432-S	1 / 500	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-0432-B	1 / 500	<input checked="" type="checkbox"/> 黑/black

接投“左” Pick up “left”



101
101

型号/Model	包装/Package	颜色/Colour
Pro-2435 L-W	1 / 154	<input type="checkbox"/> 白/White
Pro-2435 L-S	1 / 154	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2435 L-B	1 / 154	<input checked="" type="checkbox"/> 黑/black

“L”接头“右” “L” Connector “Right”



101
101

型号/Model	包装/Package	颜色/Colour
Pro-2435 R-W	1 / 154	<input type="checkbox"/> 白/White
Pro-2435 R-S	1 / 154	<input checked="" type="checkbox"/> 银灰/silver gray
Pro-2435 R-B	1 / 154	<input checked="" type="checkbox"/> 黑/black

线条导轨灯系列 LINEAR TRACK LIGHT SERIES

GD18B15C (15W)
GD18B30C (30W)
GD18B45C (45W)

产品特点 Product feature

Housing: Lathe aluminum, powder coating
Reflector: PC

LED brand: BRIDGELUX HONGLEI-HHJU

Driver brand: Driver on board

Input voltage: 220-240VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
反 射 器: PC

光源品牌: BRIDGELUX HONGLEI-HHJU

驱动品牌: AC LED

输入电压: 220-240VAC/50-60Hz


产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	GD18B15C	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	GD18B30C	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	GD18B45C	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm
HONGLEI-HHJU	GD18B15C	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	GD18B30C	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	GD18B45C	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm

可选反光杯颜色/Optional reflector color

白色
White金色
Gold

可选光斑图形/Optional light shape

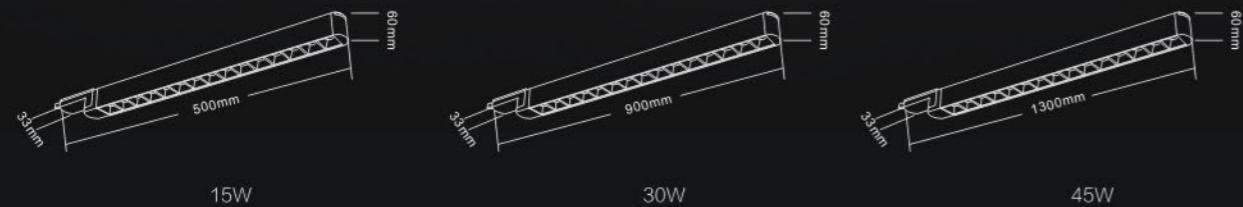

线条导轨灯系列
LINEAR TRACK LIGHT SERIES

GD18B20D (20W)

GD18B40D (40W)

GD18B60D (60W)



20W



40W



60W

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLIGHT

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PC

光源品牌: BRIDGELUX HONGLIGHT

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	GD18B20D	20W	Ra≥80	100°	3000K 4000K 6000K	1600Lm 1600Lm 1760Lm
	GD18B40D	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	GD18B60D	60W	Ra≥80	100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm
	GD18B20D	20W	Ra≥80	100°	3000K 4000K 6000K	1600Lm 1600Lm 1760Lm
	GD18B40D	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	GD18B60D	60W	Ra≥80	100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm

线条导轨灯系列
LINEAR TRACK LIGHT SERIES

GD18B26CD (26W)

GD18B40CD (40W)

GD18B50CD (50W)



可选反光杯颜色/Optional reflector color

白色
White金色
Gold

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLE

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONGLE

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	GD18B26CD	26W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	1900Lm 1900Lm 2100Lm
	GD18B40CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3000Lm 3000Lm 3300Lm
	GD18B50CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3700Lm 3700Lm 4100Lm
	GD18B26CD	26W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	1900Lm 1900Lm 2100Lm
	GD18B40CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3000Lm 3000Lm 3300Lm
	GD18B50CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3700Lm 3700Lm 4100Lm

线条导轨灯系列
LINEAR TRACK LIGHT SERIES


GD18B15C-Z (15W)

GD18B30C-Z (30W)


GD18B45C-Z (45W)




可选反光杯颜色/Optional reflector color

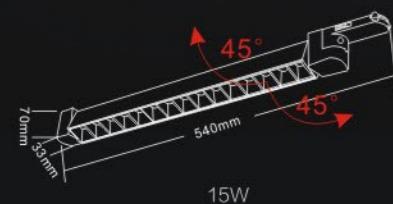白色
White金色
Gold

15W

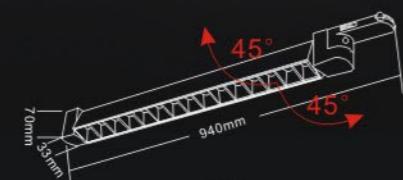


30W

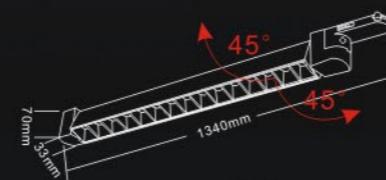

45W

可选光斑图形/Optional light shape

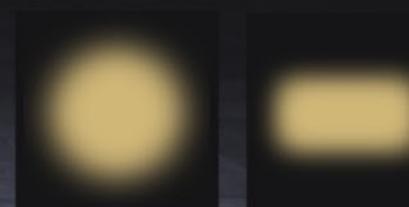

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONLUX 鸿利智汇

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONLUX 鸿利智汇

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	GD18B15C-Z	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	GD18B30C-Z	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	GD18B45C-Z	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm
HONLUX 鸿利智汇	GD18B15C-Z	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	GD18B30C-Z	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	GD18B45C-Z	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm

线条导轨灯系列
LINEAR TRACK LIGHT SERIES


GD18B15E-Z (15W)

GD18B30E-Z (30W)


GD18B45E-Z (45W)

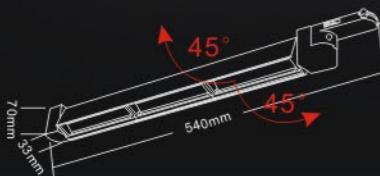

15W

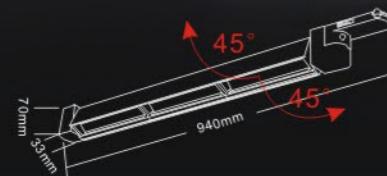

30W

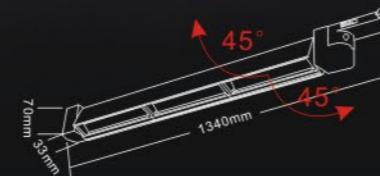

45W

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONLUX 鸿利智汇

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PC

光源品牌: BRIDGELUX HONLUX 鸿利智汇

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	GD18B15E-Z	15W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	900Lm 900Lm 1000Lm
	GD18B30E-Z	30W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	1800Lm 1800Lm 2000Lm
	GD18B45E-Z	45W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	2700Lm 2700Lm 3000Lm
HONLUX 鸿利智汇	GD18B15E-Z	15W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	900Lm 900Lm 1000Lm
	GD18B30E-Z	30W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	1800Lm 1800Lm 2000Lm
	GD18B45E-Z	45W	Ra≥80	偏光20° Polarized 20°	3000K 4000K 6000K	2700Lm 2700Lm 3000Lm

线条导轨灯系列
LINEAR TRACK LIGHT SERIES

GD18B20D-Z (20W)

GD18B40D-Z (40W)

GD18B60D-Z (60W)



产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLE

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PC

光源品牌: BRIDGELUX HONGLE

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	GD18B20D-Z	20W	Ra≥80	100°	3000K 4000K 6000K	1600Lm 1600Lm 1760Lm
	GD18B40D-Z	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	GD18B60D-Z	60W	Ra≥80	100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm
	GD18B20D-Z	20W	Ra≥80	100°	3000K 4000K 6000K	1600Lm 1600Lm 1760Lm
	GD18B40D-Z	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	GD18B60D-Z	60W	Ra≥80	100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm

线条导轨灯系列
LINEAR TRACK LIGHT SERIES


GD18B50C (50W)



可选反光杯颜色/Optional reflector color

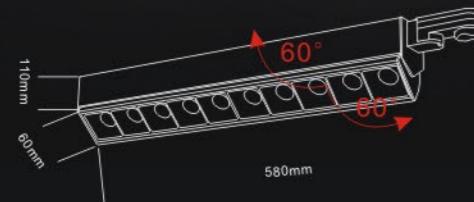白色
White金色
Gold

可选光斑图形/Optional light shape

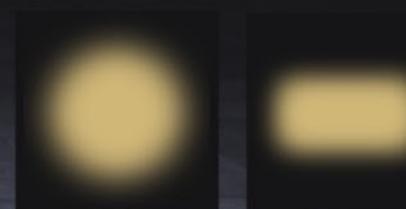

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLUX 鸿利智汇

Driver brand: KGP 韶音智匯 EAGLCRISE

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONGLUX 鸿利智汇

驱动品牌: KGP 韶音智匯 EAGLCRISE

输入电压: 180~265VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	GD18B50C	50W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3800Lm 3800Lm 4200Lm
HONGLUX 鸿利智汇	GD18B50C	50W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3800Lm 3800Lm 4200Lm



线条导轨灯系列
LINEAR TRACK LIGHT SERIES

GD18B40S (40W)



产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLE ZH-HU

Driver brand: KGP 韩国光谱 EAGLRISE

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PC

光源品牌: BRIDGELUX HONGLE ZH-HU

驱动品牌: KGP 韩国光谱 EAGLRISE

输入电压: 180~265VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	GD18B40S	SMD 40W	Ra≥80	100°	3000K 4000K 6000K	3600Lm 3600Lm 4000Lm
HONGLE ZH-HU	GD18B40S	SMD 40W	Ra≥80	100°	3000K 4000K 6000K	3600Lm 3600Lm 4000Lm





LED Track Light Series

采用新一代优质COB大尺寸芯片，高端封装工艺，光色稳定，亮度更高，光眩均匀，采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪。


Big size using a new generation of high-quality COB chip, high-end packaging technology, light color stability, higher brightness, uniform light dazzled, adopts constant current drive, A more stable quality and longer service life, no stroboscopic light.

- 产品特点 Characteristic:
- 灯体采用优质高端铝材，全角度的设计理念，大气时尚，欧洲级工艺水准，专业级的品质标准；
- 专业的光学设计，配光准确，芯片利用光学透镜，光利用率高，保证了严苛的光视角控制，光斑完美，抛物线曲面设计，投射效果更好，能更有效的降低光损；
- 采用新一代优质COB大尺寸芯片，高端封装工艺，顶级品质；光色稳定，亮度更高，光眩均匀，
- 采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪，保护眼睛视力；
- The lamp body is made of aerospace Precision aluminum, the atmosphere among the European level, process level, world class quality standards;
- Professional optical design, accurate light distribution, chip using optical lens, high luminous efficiency, perfect spot, parabolic surface design, projection effect is better, can effectively reduce the light loss;
- Adopt new generation of imported COB chip size, high-end packaging technology, top quality, color stability, high brightness, uniform light.
- Adopt constant current drive, more stable quality, long service life, light, no flicker, protect the eyes





多种光束角供选择
20°/24°/36°光束角，角度更精准，光斑更集中，中心光强提升30%以上。
Multiple beam angles to choose from
20°/24°/36° beam angle, more precise angle, flare More concentrated, the center light intensity increased by more than 30%.

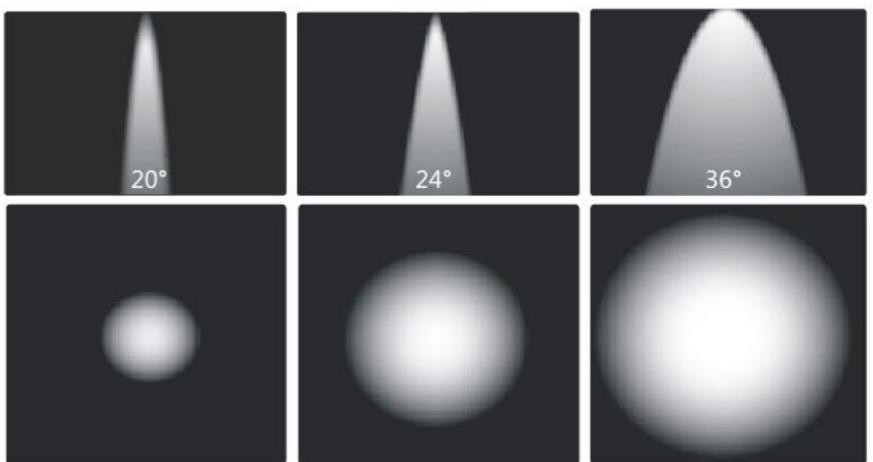

可变焦、可调光
有可变焦款可选，拉伸变焦可实现20°-60°切换
Zoom, dimmable
Available with zoomable version,
stretch zoom for 20°-60° switching



调焦导轨灯系列 TRACK LIGHT ANGLE ADJUSTBALE SERIES

**GD16P10A (10W)
GD16P20B (20W)
GD16P30C (30W/40W)**



产品特点 Product feature




Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: PA
LED brand: CITIZEN CREE HONGLEI
Driver brand: KGP EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: PA
光源品牌: CITIZEN CREE HONGLEI
驱动品牌: KGP EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16P10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD16P20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD16P30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	GD16P10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD16P20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD16P30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLEI 鸿利智汇	GD16P10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD16P20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD16P30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
GD16P30C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve

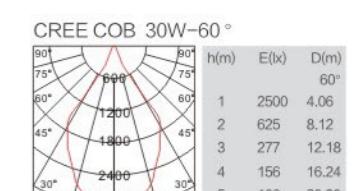

调焦导轨灯系列 TRACK LIGHT ANGLE ADJUSTBALE SERIES

RS-2298A (30W/40W)



产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: PA
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE AI Dimming®
Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: PA
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE AI Dimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2298A	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298A	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	RS-2298A	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298A	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLI 鸿利智汇	RS-2298A	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298A	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve



调焦导轨灯系列 TRACK LIGHT ANGLE ADJUSTBALE SERIES

RS-2298B (30W/40W)



产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: PA
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE AI Dimming®
Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: PA
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE AI Dimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2298B	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298B	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	RS-2298B	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298B	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLI 鸿利智汇	RS-2298B	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298B	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve

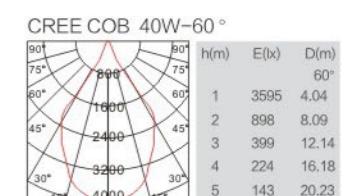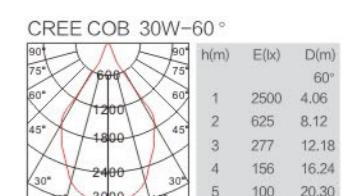

调焦导轨灯系列 TRACK LIGHT ANGLE ADJUSTBALE SERIES

RS-2298C (30W/40W)

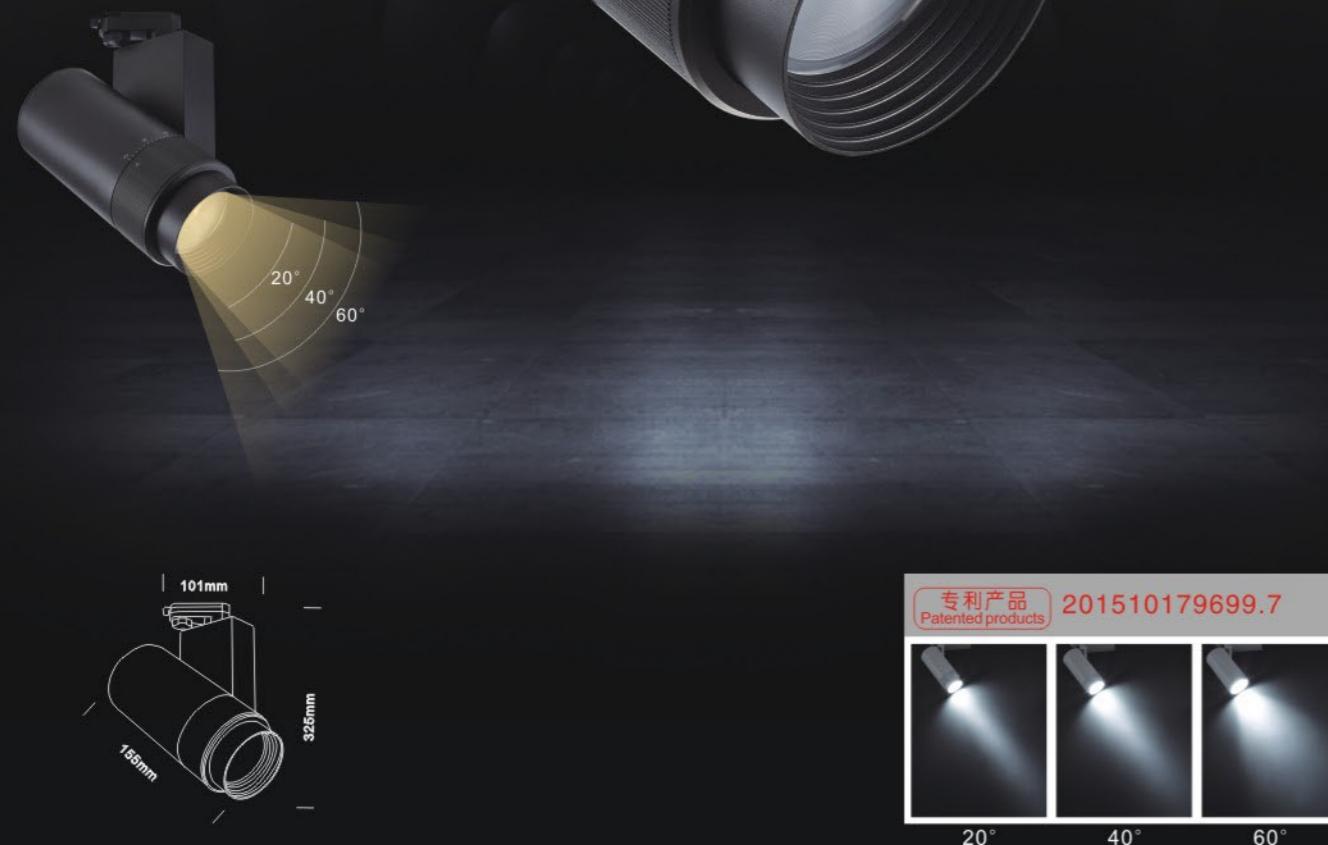

产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: PA
LED brand: CITIZEN CREE HONGLEI 洪利智汇
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: PA
光源品牌: CITIZEN CREE HONGLEI 洪利智汇
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2298C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	RS-2298C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLEI 洪利智汇	RS-2298C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2298C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve

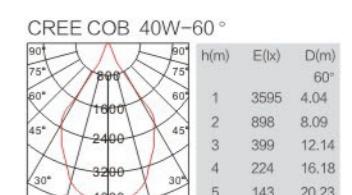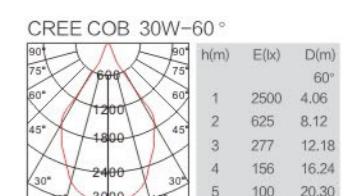


导轨灯系列 TRACK LIGHT SERIES

**GD18A10C (10W/20W)
GD18A20C (20W/30W)
GD18A30C (30W/40W)**



Optional DALI configuration

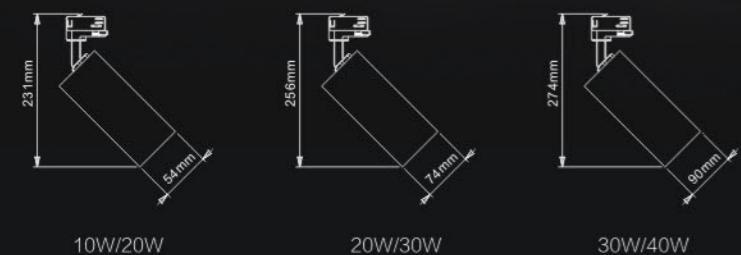

可选配件 / Optional accessories



产品特点 Product feature







Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: PC
Reflector: PA
LED brand: CITIZEN CREE HONGLEZHIHUI
Driver brand: KGP TRIDONIC EAGLERISE ADimming®
Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: PC
反 射 器: PA
光源品牌: CITIZEN CREE HONGLEZHIHUI
驱动品牌: KGP TRIDONIC EAGLERISE ADimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD18A10C	10W/20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18A20C	20W/30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18A30C	30W/40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	GD18A10C	10W/20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18A20C	20W/30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18A30C	30W/40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLEZHIHUI 鸿利智汇	GD18A10C	10W/20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18A20C	20W/30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18A30C	30W/40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES




**GD18C10A (10W)
GD18C20A (20W)
GD18C30A (30W)
GD18C40A (40W)**



Optional DALI configuration



玫瑰金
Plated gold 铬
Plated chrome 枪黑
Plated black

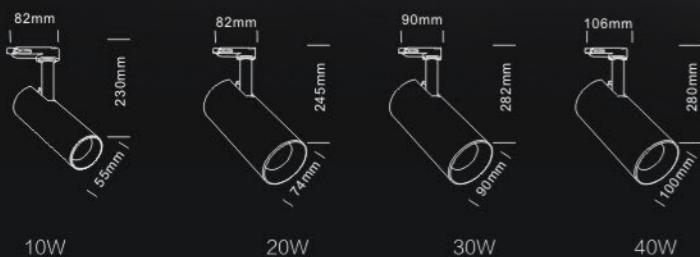

可选配件 / Optional accessories



黑色
Black 白色
White 金色
Gold 蜂窝网
Honey comb

产品特点 Product feature




Housing: Lathe aluminum, powder coating
Mounting ring: PC
Reflector: PC
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE AI Dimming®
Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: PC
反 射 器: PC
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE AI Dimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD18C10A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18C20A	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18C30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18C40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	GD18C10A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18C20A	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18C30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18C40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLI 鸿利智汇	GD18C10A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD18C20A	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18C30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18C40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve

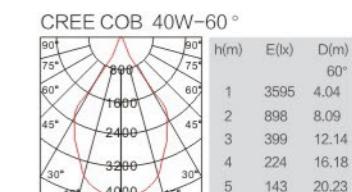

导轨灯系列 TRACK LIGHT SERIES

**GD18H30A (30W)
GD18H40A (40W)
GD18H50A (50W)
GD18H60A (60W)**



可选配件 / Optional accessories



黑色 Black 白色 White 金色 Gold

产品特点 Product feature


Housing: Lathe aluminum, powder coating
Mounting ring: PC
Reflector: Aluminum+PC
LED brand: CITIZEN CREE HONGLEI 鸿利智汇
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: PC
反 射 器: 铝+PC
光源品牌: CITIZEN CREE HONGLEI 鸿利智汇
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD18H30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18H40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD18H50A	50W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD18H60A	60W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
CREE 科锐	GD18H30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18H40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD18H50A	50W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD18H60A	60W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
HONGLEI 鸿利智汇	GD18H30A	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD18H40A	40W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD18H50A	50W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD18H60A	60W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm

光强分布曲线
The intensity distribution curve

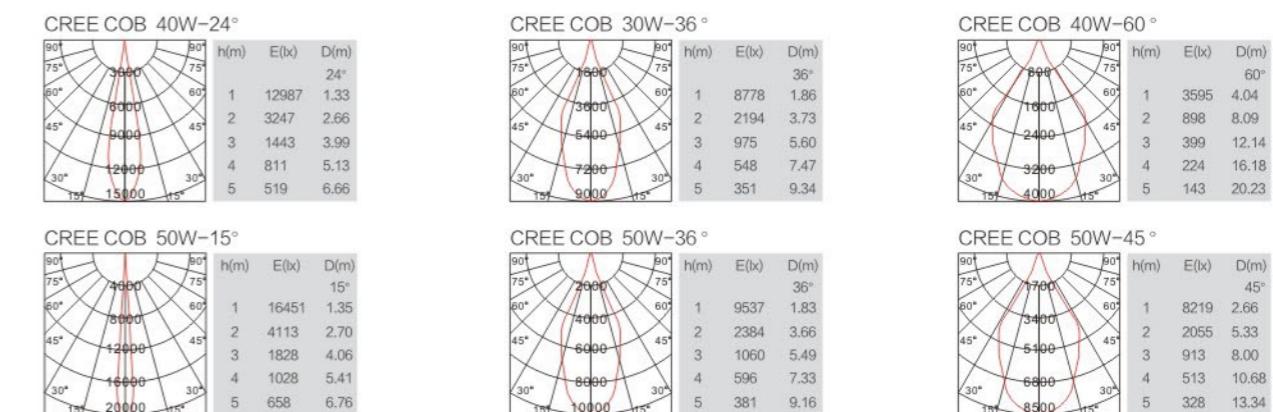

导轨灯系列 TRACK LIGHT SERIES

**GD17J30C (30W)
GD17J40C (40W)**



产品特点 Product feature







Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLEI 洪利智汇
Driver brand: KGP 韩石香港 TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLEI 洪利智汇
驱动品牌: KGP 韩石香港 TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter



光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD17J30C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD17J40C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	GD17J40C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD17J30C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLEI 洪利智汇	GD17J40C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD17J30C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve

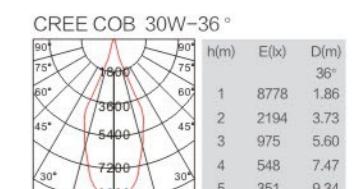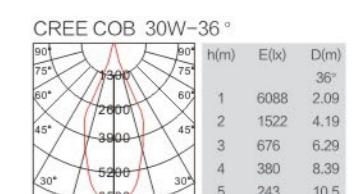

导轨灯系列 TRACK LIGHT SERIES

GD17K30B (30W)
GD17K40B (40W)



产品特点 Product feature







Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLEI 鸿利智汇
Driver brand: KGP 韩石香港 TRIDONIC EAGL RISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLEI 鸿利智汇
驱动品牌: KGP 韩石香港 TRIDONIC EAGL RISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD17K30B	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40B	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	GD17K30B	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40B	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLEI 鸿利智汇	GD17K30B	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40B	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD17K30A (30W)
GD17K40A (40W)



Optional DALI configuration



可选配件 / Optional accessories



透镜
Optical lens



蜂窝网
Honey comb

产品特点 Product feature







Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGL RISE
Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGL RISE
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD17K30A	30W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40A	40W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	GD17K30A	30W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40A	40W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLI 鸿利智汇	GD17K30A	30W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD17K40A	40W	Ra≥80	15° 24° 38° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线
The intensity distribution curve

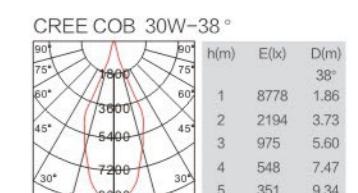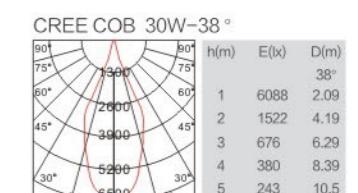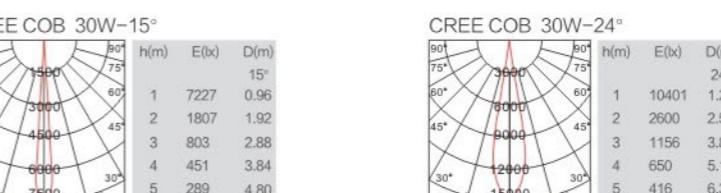

导轨灯系列 TRACK LIGHT SERIES

**GD16H40C (30W/40W)
GD16H50D (50W)
GD16H60E (60W)**



可选配件 / Optional accessories

蜂窝网
Honey comb

产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLUI 鸿利智汇
Driver brand: KGP KELVIN TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLUI 鸿利智汇
驱动品牌: KGP KELVIN TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16H40C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16H40C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16H50D	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD16H60E	60W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4200Lm 4200Lm 4200Lm
CREE 科锐	GD16H40C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16H40C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16H50D	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD16H60E	60W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4200Lm 4200Lm 4200Lm
HONGLUZHIHUI 鸿利智汇	GD16H40C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16H40C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16H50D	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
	GD16H60E	60W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4200Lm 4200Lm 4200Lm

光强分布曲线
The intensity distribution curve





热处理

要保证LED产品长寿命和工作时尽可能高效率，有效的热处理绝对必要。温度升高，不但LED芯片的工作寿命降低，而且LED芯片的效率也会降低。

仅仅散热器大不能视作评判散热效果好的有效质量标准。铝基板和散热器之间的热连接件必须要保证可靠，签于此，我们采用符合要求的国际一流品牌的热垫片或部件。

品质检验过程中，不但要检验LED芯片与铝基板之间的连接件，还需要参照LED芯片制造商的规格。

To ensure the LED products as high efficiency, long life and your job effective heat treatment is absolutely necessary.Temperature rise, not only the work of the LED chip For life is reduced, and the efficiency of the LED chip is decreased.

Radiator big not only as a judge the cooling effective quality standard with good effect.Aluminum base plate and the radiator heat between fitting must be guaranteed Depend, sign here, we adopt conform to the requirements of the international first-class brand hot pads or component part (s).

Quality inspection process, not only to test the LED chip and aluminum plate between the fittings, also need to refer to the specifications of the LED chip maker.



反射器

LED灯具与世界一流光学设计公司合作，采用双层反射器设计系统，成功开发出具有配光精准、光线均匀、光晕自然的高品质光学器件。同时、该反射器还具有黑光反射器的特点，能最大程度将灯具内的光线输出去，有效降低光在反射器表面残留。从而明显降低天花板面的灯具存在感，达到见光不见灯的效果。

Cooperation with world first-class optical design company LED lamps and lanterns, adopting double reflector design system, developed successfully with precise and light even light, the halo natural high quality optics.At the same time, the reflector is also has the characteristics of black light reflector, to the greatest extent would carry out in light of lamps and lanterns, effectively reduce the light in the reflector surface residue.Sense to decrease below the ceiling lamps and lanterns, to see the light to see the effect of the lamp.

导轨灯系列 TRACK LIGHT SERIES

GD16R30A (30W)
GD16R40A (40W)



可选配件 / Optional accessories

蜂窝网 Honey comb

产品特点 Product feature





Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16R30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16R40A	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	GD16R30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16R40A	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLI 鸿利智汇	GD16R30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16R40A	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD17L10B (10W)
GD17L20C (20W)



10W

20W

产品特点 Product feature

Housing: Lathe aluminum, powder coating
Reflector: PA

LED brand: CITIZEN CREE HONGLI

Driver brand: KGP EAGLCRISE

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
反 射 器: PA

光源品牌: CITIZEN CREE HONGLI





驱动品牌: KGP EAGLCRISE

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD17L10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
CREE 科锐	GD17L10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
HONGLI 鸿利智汇	GD17L10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD17L10A (10W)
GD17L20A (20W)



130mm
250mm
86mm

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Reflector: PA

LED brand: CITIZEN CREE HONGLEI

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PA

光源品牌: CITIZEN CREE HONGLEI





驱动品牌: KGP TRIDONIC EAGLERISE

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD17L10A	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20A	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
CREE 科锐	GD17L10A	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20A	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
HONGLEI 鸿利智汇	GD17L10A	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	GD17L20A	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD18R15A (15W)
GD18R20B (20W)
GD18R30C (30W)



产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: PC

Reflector: PA

LED brand: CITIZEN CREE HONCLIGHT

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

前环: PC

反 射 器: PA

光源品牌: CITIZEN CREE HONCLIGHT


驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD18R15A	15W	Ra≥80	36° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	GD18R20B	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18R30C	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	GD18R15A	15W	Ra≥80	36° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	GD18R20B	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18R30C	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONCLIGHT 鸿利智汇	GD18R15A	15W	Ra≥80	36° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	GD18R20B	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	GD18R30C	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve



导轨灯系列
TRACK LIGHT SERIES

GD16S10B (10W)



产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PA

LED brand: CITIZEN CREE HONGLE

Driver brand: KGP EAGLERISE

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

反 射 器: PA

光源品牌: CITIZEN CREE HONGLE



驱动品牌: KGP EAGLERISE

输入电压: 180~265VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16S10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm
CREE 科锐	GD16S10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm
HONGLE 鸿利智汇	GD16S10B	10W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	800Lm 800Lm 800Lm

光强分布曲线
The intensity distribution curve

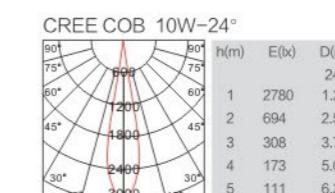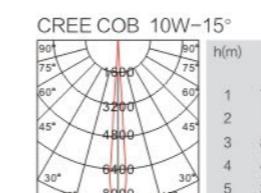

导轨灯系列 TRACK LIGHT SERIES

GD16S10A (10W)



产品特点 Product feature


Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: PA
LED brand: CITIZEN CREE HONGLE 洪利智汇
Driver brand: KGP 鹰客普 EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: PA
光源品牌: CITIZEN CREE HONGLE 洪利智汇
驱动品牌: KGP 鹰客普 EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16S10A	10W	Ra≥80	30° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm
CREE 科锐	GD16S10A	10W	Ra≥80	30° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm
HONGLE 洪利智汇	GD16S10A	10W	Ra≥80	30° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm

光强分布曲线
The intensity distribution curve





使用轨道射灯能更好地展示出产品的特色并营造出充满吸引力的购物环境，激发消费者的购物欲望。要达到这样的照明效果，对比度、配光和色温的选择都是非常重要的。我们提供专业的照明产品和解决方案，带给你最佳的商品展示效果。

Use shoot the lamp to be better able to display the product features and build an attractive shopping environment, stimulate consumer's shopping desire. To achieve the lighting effect, contrast, light distribution and the choice of the color temperature is very important. provide professional lighting products and solutions, bring you the best goods display effect.




● 产品特点 Characteristic:

- 灯体采用优质高端铝材，全角度的设计理念，大气时尚，欧洲级工艺水准，世界级的品质标准；
- 反光杯采用优质纯铝旋压成型，阳极氧化工艺，专业二次光学设计，保证了严苛的光视角控制，光斑完美，抛物线曲面设计，投射效果更好，能更有效的降低光损；
- 采用新一代优质COB大尺寸芯片，高端封装工艺，顶级品质；光色稳定，亮度更高，光眩均匀，
- 采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪，保护眼睛视力；
- The lamp body is made of aerospace Precision aluminum, the atmosphere among the European level, process level, world class quality standards;
- Reflector imported pure aluminum molding, anodic oxidation process, the two optical design, to ensure angle control, perfect spot, parabolic surface design, projection effect is better, can effectively reduce the light loss;
- Adopt new generation of imported COB chip size, high-end packaging technology, top quality; color stability, high brightness, uniform light.
- Adopt constant current drive, more stable quality, long service life, light, no flicker, protect the eyes

导轨灯系列 TRACK LIGHT SERIES

GD16J30A (30W)

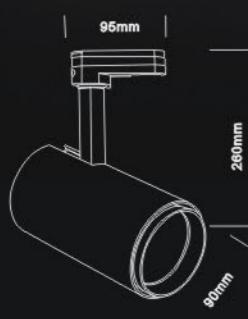

可选配件 / Optional accessories

透镜
Optical lens蜂窝网
Honey comb遮光罩
Light Hood

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: Aluminum

Reflector: Aluminum

LED brand: CITIZEN CREE HONGLE

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

前环: 铝

反 射 器: 铝

光源品牌: CITIZEN CREE HONGLE

驱动品牌: KGP EAGLERISE


输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16J30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	GD16J30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLE 鸿利智汇	GD16J30A	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve


CREE COB 30W-15°



CREE COB 30W-24°



CREE COB 30W-36 °



导轨灯系列 TRACK LIGHT SERIES

GD16G40C (40W)
GD16G50C (50W)



40W



50W

可选配件 / Optional accessories

蜂窝网
Honey comb

产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16G40C	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16G50C	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
CREE 科锐	GD16G40C	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16G50C	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
HONGLI 鸿利智汇	GD16G40C	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	GD16G50C	50W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD16H30A (30W)
GD16H30B (40W)



30W

40W

产品特点 Product feature







Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16H30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16H30B	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
CREE 科锐	GD16H30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16H30B	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
HONGLI 鸿利智汇	GD16H30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16H30B	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

**GD16H40A (40W)
GD16H40B (40W)**

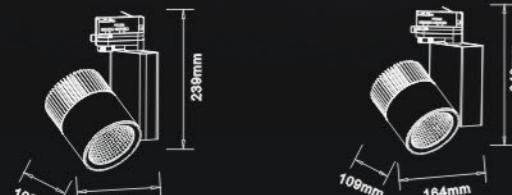

GD16H40A

GD16H40B

产品特点 Product feature




Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLI
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLI
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16H40A	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	GD16H40B	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	GD16H40A	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	GD16H40B	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLI 鸿利智汇	GD16H40A	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	GD16H40B	40W	Ra≥80	12° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线
The intensity distribution curve

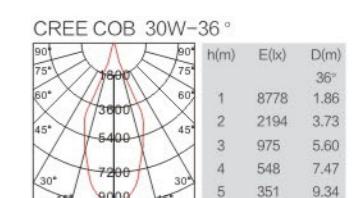

导轨灯系列 TRACK LIGHT SERIES

**GD16M30A (30W)
GD16M40A (40W)**



可选配件 / Optional accessories



蜂窝网
Honey comb

产品特点 Product feature





Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONCLIE
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONCLIE
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16M30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16M40A	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	GD16M30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16M40A	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONCLIE 鸿利智汇	GD16M30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16M40A	40W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线
The intensity distribution curve




导轨灯系列 TRACK LIGHT SERIES

GD16C10A (10W)
GD16D20A (20W)
GD16E30A (30W)



玫瑰金
Plated gold 铬
Plated chrome 枪黑
Plated black

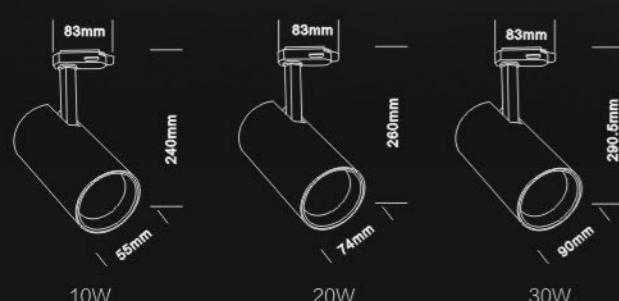

可选配件 / Optional accessories



反光杯
Reflective cup aluminum

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: Aluminum

Reflector: PC+PA

LED brand: CITIZEN CREE HONGLEI

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

前环: 铝

反 射 器: PC+PA

光源品牌: CITIZEN CREE HONGLEI




驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter



光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16C10A	10W	Ra≥80	12° 24°	3000K 4000K 6000K	900Lm 900Lm 900Lm
	GD16D20A	20W	Ra≥80	12° 24°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	GD16E30A	30W	Ra≥80	15° 24° 36° 45°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
CREE 科锐	GD16C10A	10W	Ra≥80	12° 24°	3000K 4000K 6000K	900Lm 900Lm 900Lm
	GD16D20A	20W	Ra≥80	12° 24°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	GD16E30A	30W	Ra≥80	15° 24° 36° 45°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
HONGLEI 鸿利智汇	GD16C10A	10W	Ra≥80	12° 24°	3000K 4000K 6000K	900Lm 900Lm 900Lm
	GD16D20A	20W	Ra≥80	12° 24°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	GD16E30A	30W	Ra≥80	15° 24° 36° 45°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm

光强分布曲线
The intensity distribution curve



导轨灯系列 TRACK LIGHT SERIES

GD16B30A (30W)
GD16B30C (30W)
GD16B50C (50W)

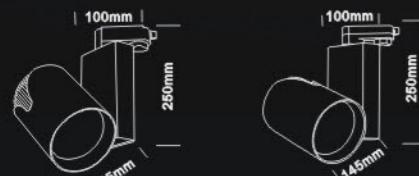

可选配件 / Optional accessories

蜂窝网
Honey comb

GD16B30A

GD16B30C

GD16B50C

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: Aluminum

LED brand: CITIZEN CREE HONGLEZHICHI

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

前环: 铝

反 射 器: 铝

光源品牌: CITIZEN CREE HONGLEZHICHI

驱动品牌: KGP TRIDONIC EAGLERISE


输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16B30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16B30C	30W	Ra≥80	15° 24° 36° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16B50C	50W	Ra≥80	10° 24° 36° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
CREE 科锐	GD16B30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16B30C	30W	Ra≥80	15° 24° 36° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16B50C	50W	Ra≥80	10° 24° 36° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm
HONGLEZHICHI 鸿利智汇	GD16B30A	30W	Ra≥80	12° 24° 36° 60°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	GD16B30C	30W	Ra≥80	15° 24° 36° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	GD16B50C	50W	Ra≥80	10° 24° 36° 60°	3000K 4000K 6000K	4000Lm 4000Lm 4000Lm

光强分布曲线
The intensity distribution curve


CREE COB 30W-15°



CREE COB 30W-24°




CREE COB 30W-36 °



导轨灯系列 TRACK LIGHT SERIES

GD02F30A (30W)



可选配件 Optional accessories

蜂窝网
Honey comb


产品特点 Product feature

Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLIZHIHUI
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反 射 器: 铝
光源品牌: CITIZEN CREE HONGLIZHIHUI
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz


产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD02F30A	30W	Ra≥80	24°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	GD02F30A	30W	Ra≥80	24°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLIZHIHUI 鸿利智汇	GD02F30A	30W	Ra≥80	24°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve

导轨灯系列 TRACK LIGHT SERIES

GD16D70A (70W)

风扇散热
Fan cooling

产品特点 Product feature


Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: PC
Reflector: Aluminum
LED brand: CITIZEN CREE HONCLE
Driver brand: KGP
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
前环: PC
反 射 器: 铝
光源品牌: CITIZEN CREE HONCLE
驱动品牌: KGP
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	GD16D70A	70W	Ra≥80	24° 45°	3000K 4000K 6000K	6500Lm 6500Lm 6500Lm
CREE 科锐	GD16D70A	70W	Ra≥80	24° 45°	3000K 4000K 6000K	6500Lm 6500Lm 6500Lm
HONCLE 鸿利智汇	GD16D70A	70W	Ra≥80	24° 45°	3000K 4000K 6000K	6500Lm 6500Lm 6500Lm

光强分布曲线
The intensity distribution curve





控光技术 Control light technology

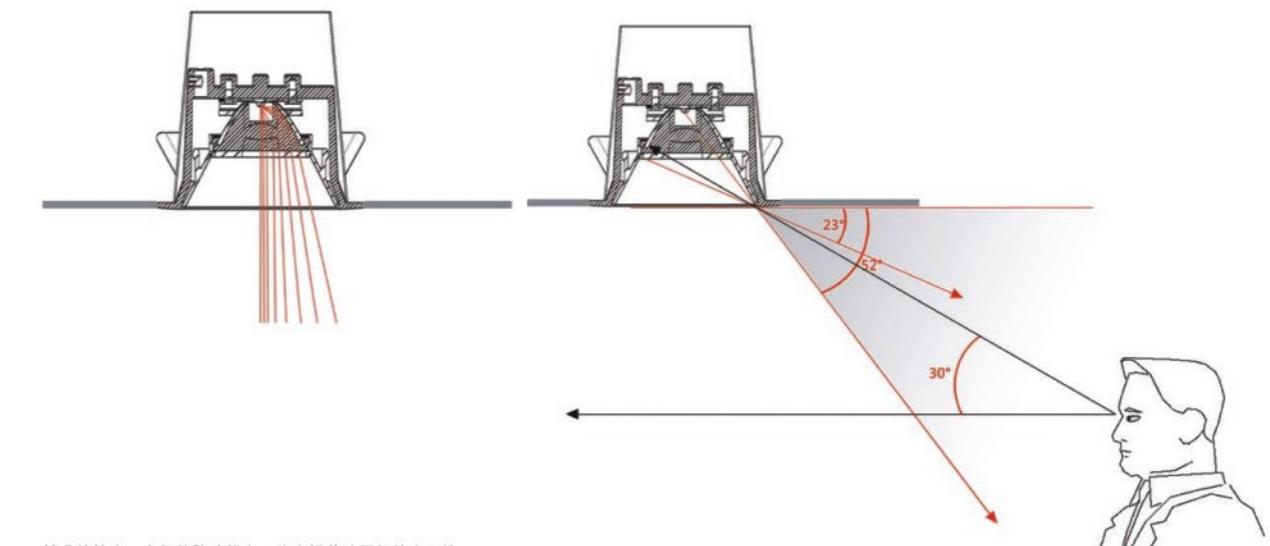


精准的控光、良好的防眩能力、为空间营造更好的光环境
Precise control of light, good anti-glare capacity for space to create a better light environment

灯具自身拥有 52° 的截光角，为空间提供良好的防眩控制，
当人们平视角度看是很舒适的 (UGR < 13)
The lamp has a 52°cut-off angle which can provide a good anti glare control.
When people look at the flat view is very comfortable.(UGR<13)

光斑形式 Facula form

多种光束角，满足不同的照明需求。
Various beam Angle, meet different lighting needs.

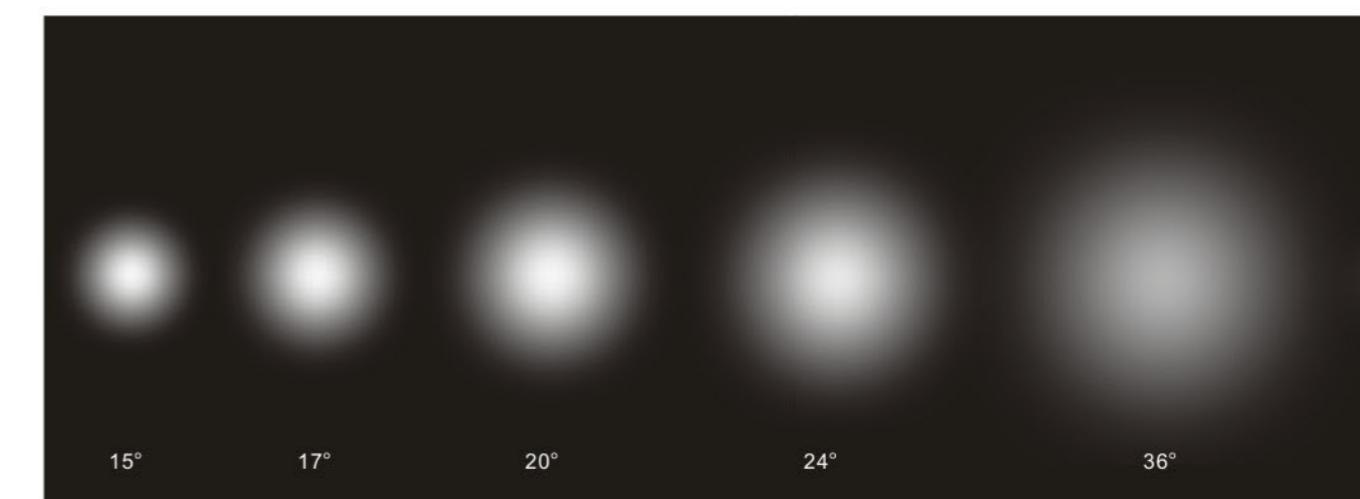


LED Ceiling Light Series

LED天花灯有优越的散热管理能力;高光效输出, 无眩光和重影, 光线柔和舒适; 显色指数高, 色彩还原性好; 耐冲击, 防震动, 安全性好;安装简易, 可直接代替传统灯具;

LED ceiling lights have excellent thermal management ability;High light output, no glare and shadow, light, soft and comfortable;High color rendering index, color reproduction is good;Impact resistance, vibration resistance, good safety;Easy installation, can directly replace the traditional lighting;

天花灯系列 CEILING LIGHT SERIES

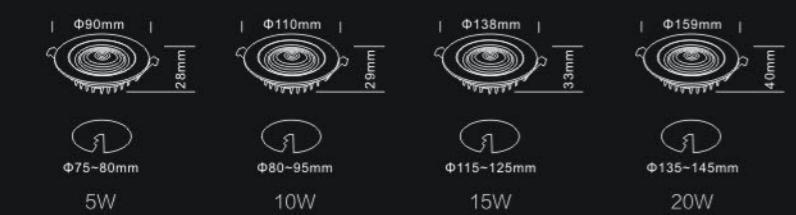TH01F05C (5W)**TH02F10C (10W)****TH03F15C (15W)****TH04F20C (20W)**

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: PA

LED brand: CITIZEN CREE HONGLEI

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: 铝

反 射 器: PA

光源品牌: CITIZEN CREE HONGLEI




驱动品牌: KGP TRIDONIC EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	TH01F05C	5W	Ra≥80	24°	3000K 4000K 6000K	400Lm 400Lm 400Lm
	TH02F10C	10W	Ra≥80	24°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	TH03F15C	15W	Ra≥80	24°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	TH04F20C	20W	Ra≥80	24°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
CREE 科锐	TH01F05C	5W	Ra≥80	24°	3000K 4000K 6000K	400Lm 400Lm 400Lm
	TH02F10C	10W	Ra≥80	24°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	TH03F15C	15W	Ra≥80	24°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	TH04F20C	20W	Ra≥80	24°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
HONGLEI 鸿利智汇	TH01F05C	5W	Ra≥80	24°	3000K 4000K 6000K	400Lm 400Lm 400Lm
	TH02F10C	10W	Ra≥80	24°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	TH03F15C	15W	Ra≥80	24°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	TH04F20C	20W	Ra≥80	24°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm

光强分布曲线
The intensity distribution curve

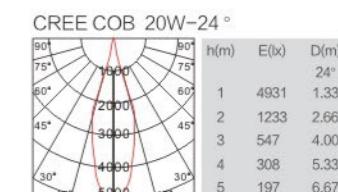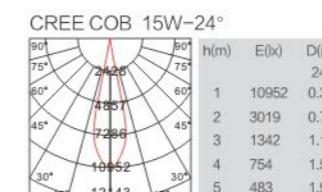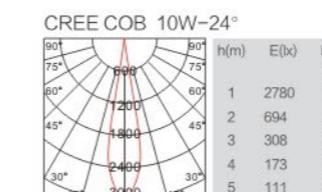

天花灯系列 CEILING LIGHT SERIES


TH01B03C (3W)

TH01B05C (5W)

TH02B07C (7W)

TH02B10C (10W)

TH03B15C (15W)

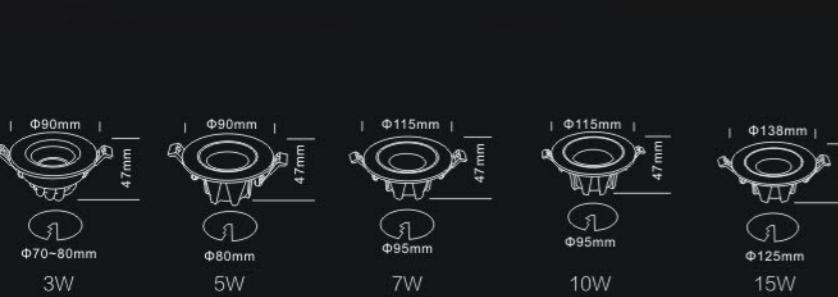

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: PC

Reflector: PC

LED brand: CITIZEN CREE HONGLEI 洪利智汇

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反 射 器: PC

光源品牌: CITIZEN CREE HONGLEI 洪利智汇



驱动品牌: KGP TRIDONIC EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	TH01B03C	3W	Ra≥80	24°	3000K 4000K 5500K	240Lm 240Lm 240Lm
	TH01B05C	5W	Ra≥80	24°	3000K 4000K 5500K	400Lm 400Lm 400Lm
	TH02B07C	7W	Ra≥80	24°	3000K 4000K 5500K	560Lm 560Lm 560Lm
	TH02B10C	10W	Ra≥80	24°	3000K 4000K 5500K	800Lm 800Lm 800Lm
	TH03B15C	15W	Ra≥80	24°	3000K 4000K 5500K	1200Lm 1200Lm 1200Lm
CREE 科锐	TH01B03C	3W	Ra≥80	24°	3000K 4000K 5500K	240Lm 240Lm 240Lm
	TH01B05C	5W	Ra≥80	24°	3000K 4000K 5500K	400Lm 400Lm 400Lm
	TH02B07C	7W	Ra≥80	24°	3000K 4000K 5500K	560Lm 560Lm 560Lm
	TH02B10C	10W	Ra≥80	24°	3000K 4000K 5500K	800Lm 800Lm 800Lm
	TH03B15C	15W	Ra≥80	24°	3000K 4000K 5500K	1200Lm 1200Lm 1200Lm
HONGLEI 洪利智汇	TH01B03C	3W	Ra≥80	24°	3000K 4000K 5500K	240Lm 240Lm 240Lm
	TH01B05C	5W	Ra≥80	24°	3000K 4000K 5500K	400Lm 400Lm 400Lm
	TH02B07C	7W	Ra≥80	24°	3000K 4000K 5500K	560Lm 560Lm 560Lm
	TH02B10C	10W	Ra≥80	24°	3000K 4000K 5500K	800Lm 800Lm 800Lm
	TH03B15C	15W	Ra≥80	24°	3000K 4000K 5500K	1200Lm 1200Lm 1200Lm

光强分布曲线
The intensity distribution curve





LED Downlight Series

灯体采用优质铝材，大气时尚，欧洲级工艺水准，世界级的品质标准；选用优质品牌芯片，显色指数高，寿命更长，光衰更小，光线柔和，节能表现优异；采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪，保护眼睛视力；



The lamp body is made of Aerospace Precision aluminum, the atmosphere among the European level, process level, world class quality standards. Selection of imported brands of small power chip, high color rendering index, longer service life, light attenuation is smaller, with the diffusion plate, the optical PMMA soft light, energy-saving performance Using constant current drive, more stable quality, long service life, light, no flicker, protect the eyes;



增强的孔径分布提供了多种模式的光

高度统一、眩光少、酒店筒灯透镜分布提供了高效率的LED的光学控制透镜和向下配光透镜系统的控制，灯具的精美内环具有一个平面的光束，同时提供一个精准照明面积；

Highly unified, less glare, hotel provides efficient LED tube lamp lens distribution of optical lens and the down light distribution lens control system control, exquisite lamps and lanterns of the inner ring with a flat beam, at the same time provide a precise

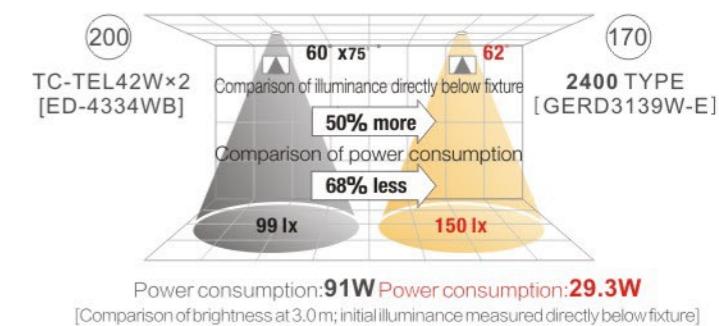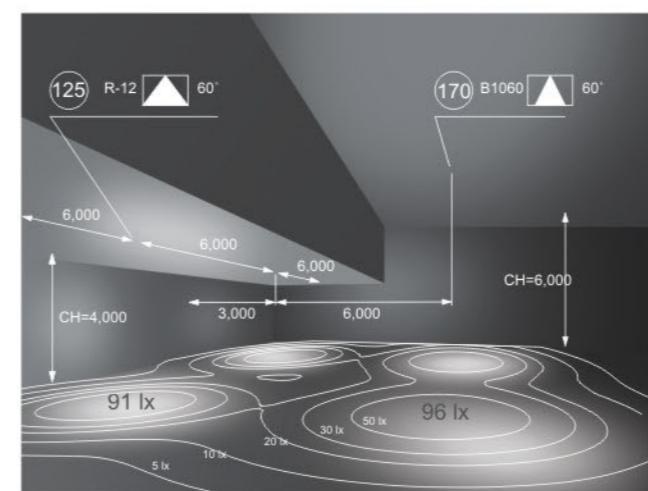



MUSIC DOWNLIGHT

两个一组，最大支持8组，共16个音响灯具连接使用
Two pcs as one group, maximum connection is eight groups



音响和灯光一举两得

轻松打造梦幻立体声,房间秒变影院
灯光和音乐影响我们的情绪和活动
Make your room being a private cinema

**蓝牙 4.0 高速连接
在线资源畅听无阻**



了哥音响筒灯系列
MUSIC DOWNLIGHT SERIES

TD04M24C 10W+音频5W(单灯)



产品特点
Product feature

Housing: Die-casting aluminum alloy, Powder coating+PC

Reflector: PA

LED brand: CITIZEN CREE HONGLI

Driver brand: ADimming®

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理+PC

反 射 器: PA

光源品牌: CITIZEN CREE HONGLI

驱动品牌: ADimming®

输入电压: 180-265VAC/50-60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	TD04M24C	10W+音频5W(单灯)	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm
CREE 科锐	TD04M24C	10W+音频5W(单灯)	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm
HONGLI 鸿利智汇	TD04M24C	10W+音频5W(单灯)	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm

**Bluetooth 4.0 high speed connection
Online resources are unobstructed**

amazon echo





You Tube
Broadcast Yourself

facebook

twitter

光强分布曲线
The intensity distribution curve

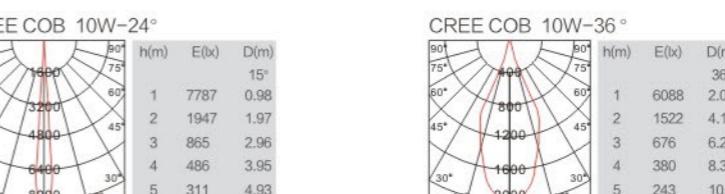

筒灯系列 DOWNLIGHT SERIES

TD04K15C (15W)
TD04K20C (20W)
TD06K30C (30W)
TD08K40C (40W)
TD08K60C (60W)



Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating
 Reflector: Aluminum
 LED brand: CITIZEN CREE HONGLEZHIHUI 鸿利智汇
 Driver brand: KGP KELVIN TRIDONIC EAGLERISE AI Dimming®
 Input voltage: 180~265VAC/50~60Hz


灯体外壳: 铝材表面静电粉末喷涂处理
 反射器: 铝
 光源品牌: CITIZEN CREE HONGLEZHIHUI 鸿利智汇
 驱动品牌: KGP KELVIN TRIDONIC EAGLERISE AI Dimming®
 输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	TD04K15C	15W	Ra≥80	90°	3000K 4000K 5500K	1350Lm 1350Lm 1350Lm
	TD04K20C	20W	Ra≥80	90°	3000K 4000K 5500K	1800Lm 1800Lm 1800Lm
	TD06K30C	30W	Ra≥80	90°	3000K 4000K 5500K	2700Lm 2700Lm 2700Lm
	TD08K40C	40W	Ra≥80	90°	3000K 4000K 5500K	3600Lm 3600Lm 3600Lm
	TD08K60C	60W	Ra≥80	90°	3000K 4000K 5500K	5400Lm 5400Lm 5400Lm
CREE 科锐	TD04K15C	15W	Ra≥80	90°	3000K 4000K 5500K	1350Lm 1350Lm 1350Lm
	TD04K20C	20W	Ra≥80	90°	3000K 4000K 5500K	1800Lm 1800Lm 1800Lm
	TD06K30C	30W	Ra≥80	90°	3000K 4000K 5500K	2700Lm 2700Lm 2700Lm
	TD08K40C	40W	Ra≥80	90°	3000K 4000K 5500K	3600Lm 3600Lm 3600Lm
	TD08K60C	60W	Ra≥80	90°	3000K 4000K 5500K	5400Lm 5400Lm 5400Lm
HONGLEZHIHUI 鸿利智汇	TD04K15C	15W	Ra≥80	90°	3000K 4000K 5500K	1350Lm 1350Lm 1350Lm
	TD04K20C	20W	Ra≥80	90°	3000K 4000K 5500K	1800Lm 1800Lm 1800Lm
	TD06K30C	30W	Ra≥80	90°	3000K 4000K 5500K	2700Lm 2700Lm 2700Lm
	TD08K40C	40W	Ra≥80	90°	3000K 4000K 5500K	3600Lm 3600Lm 3600Lm
	TD08K60C	60W	Ra≥80	90°	3000K 4000K 5500K	5400Lm 5400Lm 5400Lm

筒灯系列 DOWNLIGHT SERIES

TD25C05S (5W)
TD03C07S (7W)
TD04C12S (12W)
TD06C18S (18W)
TD08C25S (25W)
TD08C30S (30W)

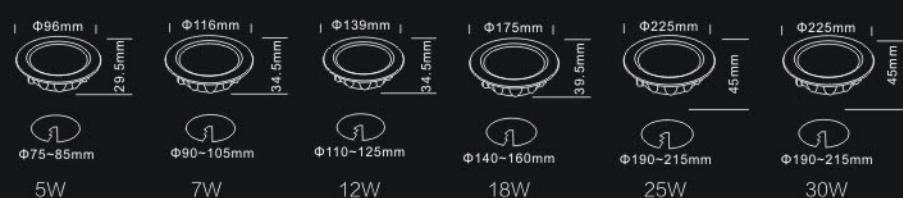

产品特点 Product feature


Housing: Die-casting aluminum alloy, Powder coating
 Reflector: PC
 LED brand: CITIZEN CREE HONGLUX 鸿利智汇
 Driver brand: KGP TRIDONIC EAGLERISE
 Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理
 反射器: PC
 光源品牌: CITIZEN CREE HONGLUX 鸿利智汇
 驱动品牌: KGP TRIDONIC EAGLERISE
 输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
BRIDGELUX	TD25C05S	5W	Ra≥80	90°	3000K 4000K 6000K	350Lm 350Lm 350Lm
HONGLUX 鸿利智汇	TD03C07S	7W	Ra≥80	90°	3000K 4000K 6000K	490Lm 490Lm 490Lm
TD04C12S	12W	Ra≥80	90°	3000K 4000K 6000K	850Lm 850Lm 850Lm	
TD06C18S	18W	Ra≥80	90°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm	
TD08C25S	25W	Ra≥80	90°	3000K 4000K 6000K	1750Lm 1750Lm 1750Lm	
TD08C30S	30W	Ra≥80	90°	3000K 4000K 6000K	2100Lm 2100Lm 2100Lm	
TD25C05S	5W	Ra≥80	90°	3000K 4000K 6000K	350Lm 350Lm 350Lm	
TD03C07S	7W	Ra≥80	90°	3000K 4000K 6000K	490Lm 490Lm 490Lm	
TD04C12S	12W	Ra≥80	90°	3000K 4000K 6000K	850Lm 850Lm 850Lm	
TD06C18S	18W	Ra≥80	90°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm	
TD08C25S	25W	Ra≥80	90°	3000K 4000K 6000K	1750Lm 1750Lm 1750Lm	
TD08C30S	30W	Ra≥80	90°	3000K 4000K 6000K	2100Lm 2100Lm 2100Lm	



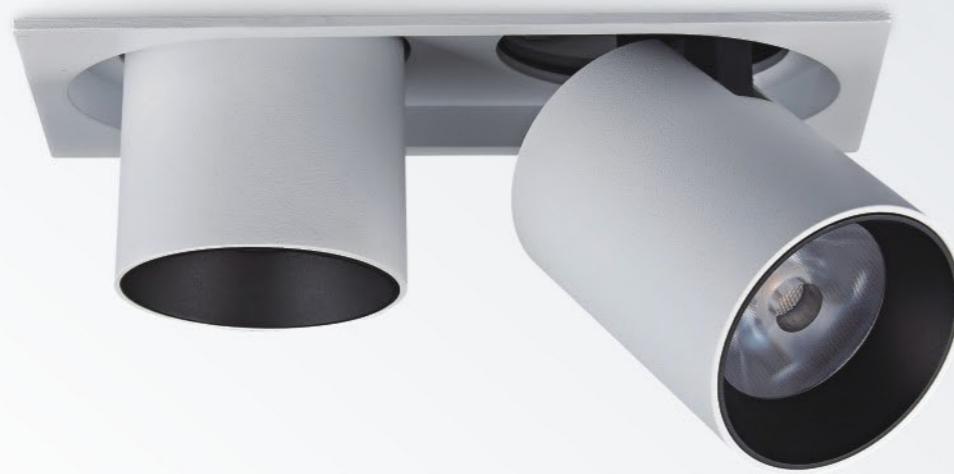

LED Spot Light Series

灯体采用优质铝材，大气时尚，欧洲级工艺水准，世界级的品质标准；选用优质品牌芯片，显色指数高，寿命更长，光衰更小，光线柔和，节能表现优异；采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪，保护眼睛视力；

The lamp body is made of Aerospace Precision aluminum, the atmosphere among the European level, process level, world class quality standards. Selection of imported brands of small power chip, high color rendering index, longer service life, light attenuation is smaller, with the diffusion plate, the optical PMMA soft light, energy-saving performance Using constant current drive, more stable quality, long service life, light, no flicker, protect the eyes

灯具与光源的一体化设计有利于精确的配光和有效的热管理，具有创新的透镜及反光杯的设计有效的引导了LED光源的光线，防眩杯的设计与光源的结合有效的控制了眩光。

防眩天花射灯主要用于展览、产品陈列、商店的物品等重点照明，倾斜可调30°。

Integration design of lamps and lanterns and light source is helpful for accurate light distribution and effective thermal management, creative design of lens and reflective cup effectively guide the LED light source, light, anti-dazzle cup design combined with the light source of effective control of the glare.

Anti-dazzle smallpox lamp is mainly used for exhibition, products into the column, store items, such as accent lighting, adjustable tilt of 30°.



Anti-dazzle smallpox lamp is mainly used for exhibition, products into the column, store items, such as accent lighting, adjustable tilt of 30°.



众多的照明用户及照明设计者还在面对一个问题，什么时候应用LED照明？

我们可以很有把握的说，LED照明现有的灯具，光源、电源技术可以在不牺牲安全性和光品质的情况下带来了巨大的节能成本，任何想使用LED照明的人都可以考虑LED产品，可以明显的看到它优良的光效效果，并且它的经济效益和社会效益显著，有效的节省了成本与资源，包括低电力成本、低维护成本、空调能耗节省、低二氧化碳排放，响应政府倡导的节能环保政策。

We can safely say that the LED lighting lamps and lanterns, existing light source, power supply technology can without sacrificing safety and quality of the cases are of great energy saving cost, any people who want to use LED lighting can consider LED products, you can clearly see it excellent lighting effects, and its economic benefit and social benefit is remarkable, effectively save the cost and resources, including low power cost, low maintenance cost, air conditioning energy saving, low carbon emissions, energy conservation and environmental protection policies advocated by the response to the government.

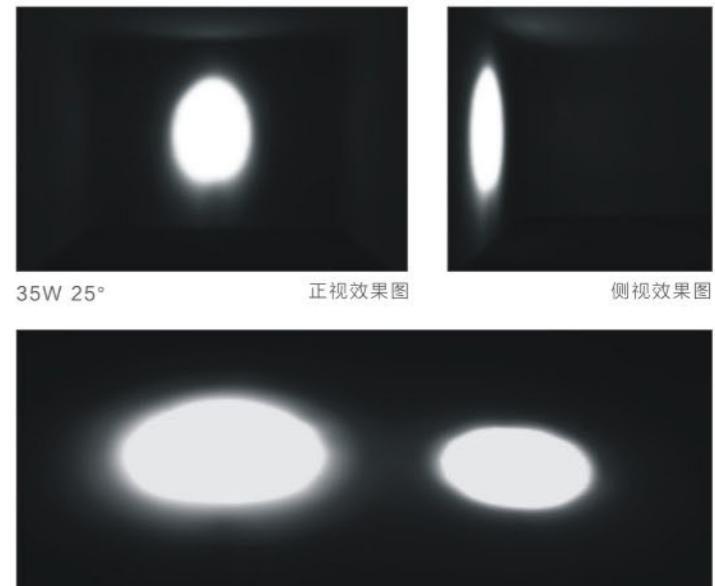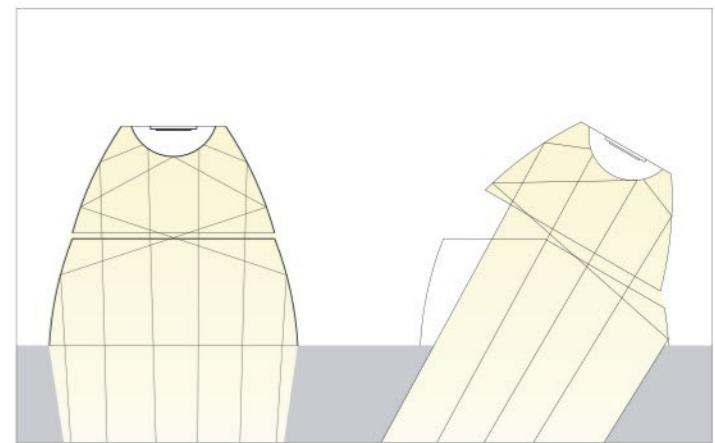

35W 25°

正视效果图

侧视效果图

35W 25°


适用于较大的物体的照射，光束角25-35°

Practical in the illuminate of larger objects, Beam Angle of 25 to 35°

35W 15°

适用于较小的物体的照射，特别是为了立体效果而应用，光束角10-20°

Practical in the illuminate of smaller objects, Application for stereo effect, in particular, Beam Angle of 10 to 20°.

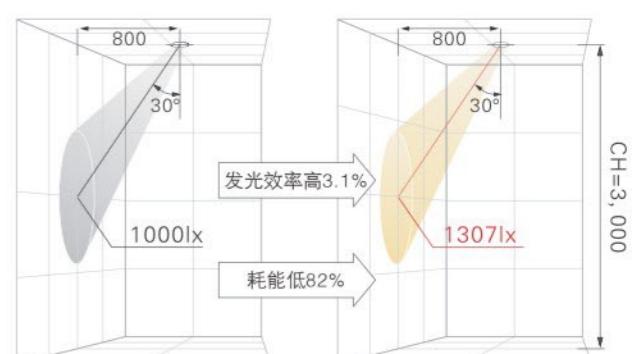

射灯系列 SPOT LIGHT SERIES

WL18B12D (12W)

WL18B12A (12W)



WL18B12D

WL18B12A



Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: PA

LED brand: CITIZEN CREE HONGLEI 鸿利智汇

Driver brand: KGP 韩光半导体 TRIDONIC EAGLERISE AI Dimming®

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: 铝

反射器: PA

光源品牌: CITIZEN CREE HONGLEI 鸿利智汇



驱动品牌: KGP 韩光半导体 TRIDONIC EAGLERISE AI Dimming®

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

	光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	WL18B12D	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	
	WL18B12A	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	
CREE 科锐	WL18B12D	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	
	WL18B12A	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	
HONGLEI 鸿利智汇	WL18B12D	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	
	WL18B12A	12W	Ra≥80	15° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm	

光强分布曲线 The intensity distribution curve



射灯系列 SPOT LIGHT SERIES

RS-2117A (30W)

RS-2117A (40W)



Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: PC

Reflector: PA

LED brand: CITIZEN CREE HONGLEI 鸿利智汇

Driver brand: KGP 韩国光研 TRIDONIC EAGLERISE AiDrimming®

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反射器: PA

光源品牌: CITIZEN CREE HONGLEI 鸿利智汇




驱动品牌: KGP 韩国光研 TRIDONIC EAGLERISE AiDrimming®

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2117A	30W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	2400Lm 2400Lm 2400Lm
	RS-2117A	40W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	3200Lm 3200Lm 3200Lm
CREE 科锐	RS-2117A	30W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	2400Lm 2400Lm 2400Lm
	RS-2117A	40W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	3200Lm 3200Lm 3200Lm
HONGLEI 鸿利智汇	RS-2117A	30W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	2400Lm 2400Lm 2400Lm
	RS-2117A	40W	Ra≥80	15° 24° 36°	3000K 4000K 5500K	3200Lm 3200Lm 3200Lm

光强分布曲线 The intensity distribution curve

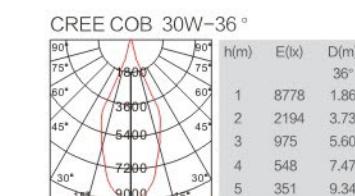

射灯系列 SPOT LIGHT SERIES


WL18C15A (15W)

WL18C30B (2x15W)

WL18C45C (3x15W)



Optional DALI configuration

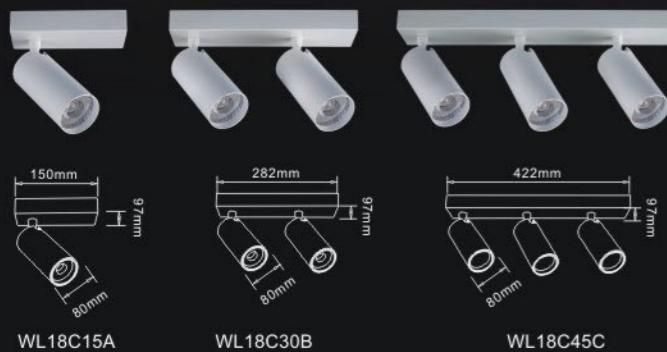

可选配件/Optional accessories

反光杯
Reflective cup aluminum

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: PC

Reflector: PA+PC

LED brand: CITIZEN CREE HONGLEZHIBI

Driver brand: KGP TRIDONIC EAGLRISE AiDimming®

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反射器: PA+PC

光源品牌: CITIZEN CREE HONGLEZHIBI



驱动品牌: KGP TRIDONIC EAGLRISE AiDimming®

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	WL18C15A	15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	WL18C30B	2x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18C45C	3x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	WL18C15A	15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	WL18C30B	2x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18C45C	3x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLEZHIBI 鸿利智汇	WL18C15A	15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	WL18C30B	2x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18C45C	3x15W	Ra≥80	15° 25° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线 The intensity distribution curve



射灯系列 SPOT LIGHT SERIES

WL18B12B (12W)

WL18B12C (12W)

WL18B24D (2x12W)



WL18B12B

WL18B12C

WL18B24D



Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: PA

LED brand: CITIZEN CREE HONGLI

Driver brand: KGP TRIDONIC EAGLERISE AiDimming®

Input voltage: 180~265VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: 铝

反射器: PA

光源品牌: CITIZEN CREE HONGLI



驱动品牌: KGP TRIDONIC EAGLERISE AiDimming®

输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	WL18B12B	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B12C	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B24D	2x12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm
CREE 科锐	WL18B12B	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B12C	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B24D	2x12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm
HONGLIZHI-HUJI 鸿利智汇	WL18B12B	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B12C	12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	960Lm 960Lm 960Lm
	WL18B24D	2x12W	Ra≥80	12° 24° 38°	3000K 4000K 6000K	1920Lm 1920Lm 1920Lm

光强分布曲线 The intensity distribution curve



射灯系列 SPOT LIGHT SERIES

WL18A10A (10W)

WL18A20B (20W)

WL18A30C (30W)

WL18A40C (40W)



Optional DALI configuration



产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: Aluminum

Reflector: PA

LED brand: CITIZEN CREE HONGLEZHIBI

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: 铝

反射器: PA




光源品牌: CITIZEN CREE HONGLEZHIBI

驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	WL18A10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	WL18A20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	WL18A30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18A40C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	WL18A10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	WL18A20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	WL18A30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18A40C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLEZHIBI 鸿利智汇	WL18A10A	10W	Ra≥80	20° ~60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	WL18A20B	20W	Ra≥80	20° ~60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	WL18A30C	30W	Ra≥80	20° ~60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	WL18A40C	40W	Ra≥80	20° ~60°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

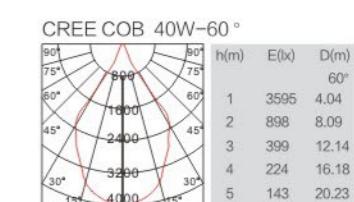光强分布曲线
The intensity distribution curve



LED Spot Light Series


卓越的光输出和有效的眩光保护，具有高效的照明性能，将光束角、眩光、光通量三大因素完美融合，灵活及可靠性强，确保最大的设计自由，创造舒适的照明效果。

Excellent light output and effective glare protection, with efficient lighting performance, the Angle of the beams, glare, light flux a perfect fusion of the three major factors flexibility and reliability, to ensure maximum freedom of design, create a comfortable lighting effect.



LED射灯替代卤素灯

在实际使用时10W的LED天花射灯可替代50W卤素灯的亮度和光的分布

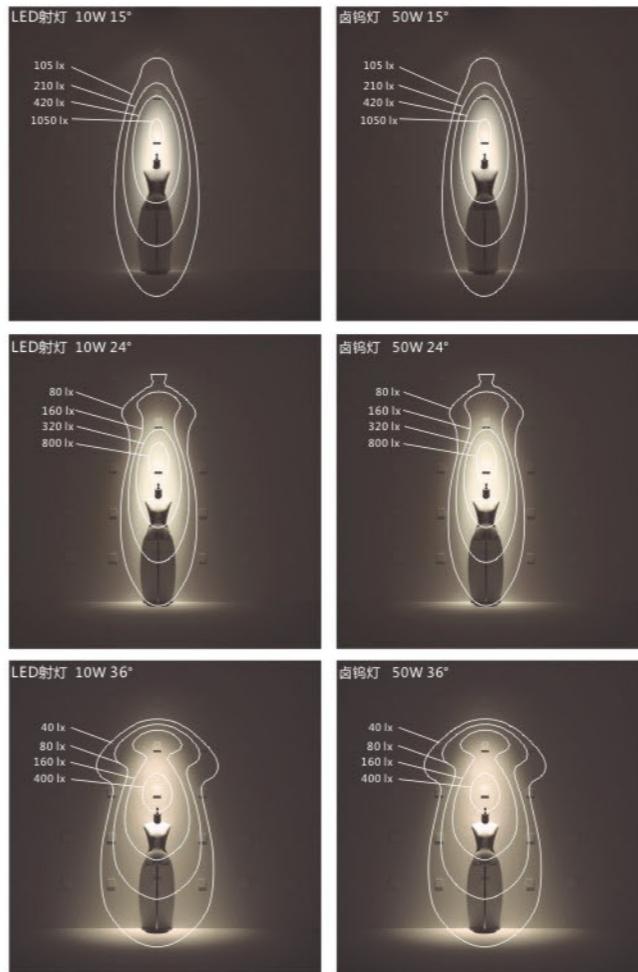

节能

由于LED具有约30000小时额定寿命，维护周期可大大延长。他们具有运行成本是比50W卤素灯的低大约84%。

营业成本



84%

使用寿命比较




3,000 h

灯泡更换10次

30 , 000 h

象鼻灯系列 SPOT LIGHT SERIES

RS-T610C (10W)
RS-T620C (20W)
RS-T630C (30W)
RS-T640C (40W)

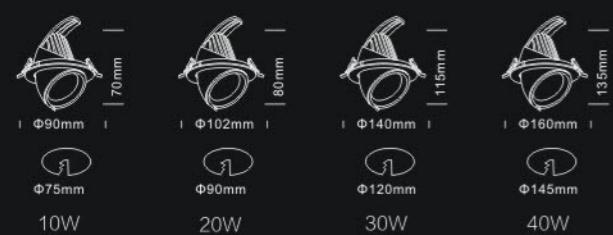

Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: Aluminum
Reflector: PC
LED brand: CITIZEN CREE HONGLEZHIHUI
Driver brand: KGP 韩光普 TRIDONIC EAGLERISE ADimming®
Input voltage: 180~265VAC/50~60Hz


灯体外壳: 铝型材表面静电粉末喷涂处理
前环: 铝
反 射 器: PC
光源品牌: CITIZEN CREE HONGLEZHIHUI
驱动品牌: KGP 韩光普 TRIDONIC EAGLERISE ADimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-T610C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T620C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T630C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T640C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
CREE 科锐	RS-T610C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T620C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T630C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T640C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
HONGLEZHIHUI 鸿利智汇	RS-T610C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T620C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T630C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T640C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm

光强分布曲线
The intensity distribution curve


CREE COB 30W-15°



CREE COB 30W-24°



CREE COB 30W-36 °

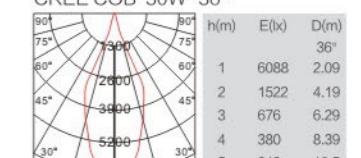


象鼻灯系列

SPOT LIGHT SERIES

RS-2120-1 (20W)**RS-2120-2 (2x20W)****RS-2130-1 (30W)****RS-2130-2 (3x30W)****RS-2140-1 (40W)****RS-2140-2 (4x40W)**

Optional DALI configuration

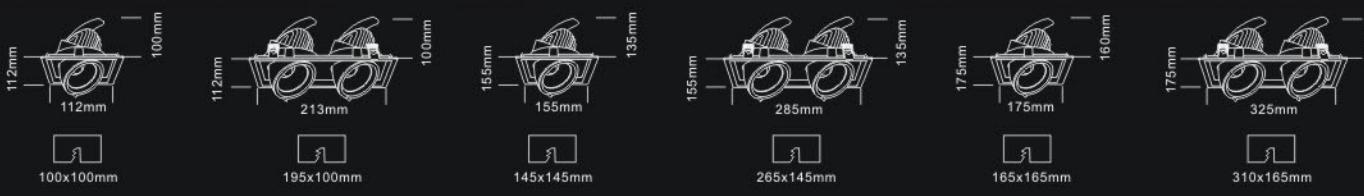

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: PC

LED brand: CITIZEN CREE HONGLEI HONGLEI

Driver brand: KGP TRIDONIC EAGLEROSE AiDimming

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反 射 器: PC

光源品牌: CITIZEN CREE HONGLEI HONGLEI




驱动品牌: KGP TRIDONIC EAGLEROSE AiDimming

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2120-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2120-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2130-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2130-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
	RS-2140-1	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2140-2	2x40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	6400Lm 6400Lm 6400Lm
CREE 科锐	RS-2120-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2120-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2130-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2130-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
	RS-2140-1	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2140-2	2x40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	6400Lm 6400Lm 6400Lm
HONGLEI 鸿利智汇	RS-2120-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2120-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2130-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2130-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
	RS-2140-1	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2140-2	2x40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	6400Lm 6400Lm 6400Lm

光强分布曲线
The intensity distribution curve



象鼻灯系列 SPOT LIGHT SERIES

RS-T107C (7W)
RS-T210C (10W)
RS-T320C (20W)
RS-T430C (30W)
RS-T540C (40W)

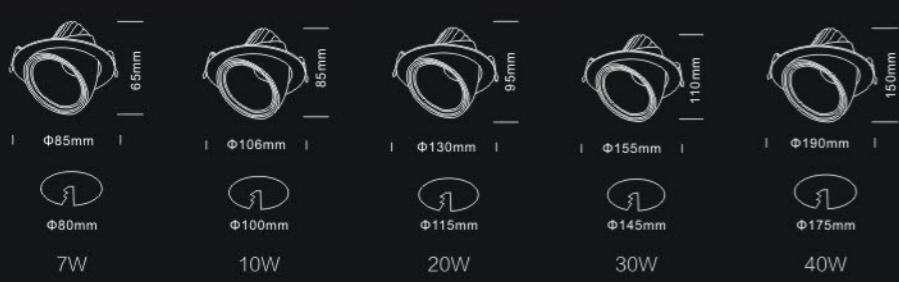

Optional DALI configuration

产品特点 Product feature

Housing: Die-casting aluminum alloy, Powder coating
Mounting ring: Aluminum
Reflector: PC
LED brand: CITIZEN CREE HONGLEI
Driver brand: KGP 鸿利智汇 TRIDONIC EAGLERISE AiDimming®
Input voltage: 180~265VAC/50~60Hz


灯体外壳: 铝型材表面静电粉末喷涂处理
前环: 铝
反 射 器: PC
光源品牌: CITIZEN CREE HONGLEI
驱动品牌: KGP 鸿利智汇 TRIDONIC EAGLERISE AiDimming®
输入电压: 180~265VAC/50~60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-T107C	7W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	560Lm 560Lm 560Lm
	RS-T210C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T320C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T430C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T540C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
CREE 科锐	RS-T107C	7W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	560Lm 560Lm 560Lm
	RS-T210C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T320C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T430C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T540C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
HONGLEI 鸿利智汇	RS-T107C	7W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	560Lm 560Lm 560Lm
	RS-T210C	10W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-T320C	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-T430C	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-T540C	40W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm

光强分布曲线 The intensity distribution curve


CREE COB 40W-15°



CREE COB 40W-24°



CREE COB 30W-36°

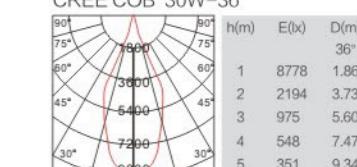



LED Grille Light Series

所有优秀的陈列都得益于照明的艺术。在经过近一个世纪的发展，创造了不同的照明解决方案，从而使观赏者在其中感受深刻。即使是良好的设计，如果照明产品应用不慎，珍贵的物品可能因为长时间处于过于明亮的灯光照射下而被破坏。我们为顾客与设计师指导并提供高效且安全、合适的照明设施。

All excellent exhibition have benefited from the art of lighting. After nearly a century of development, create different lighting solutions, so the viewer feeling in which profound. Even a good design, if you accidentally lighting product applications, valuable items may be damaged because a long time in an overly bright lights and, its always the customer and the designer guidance and provide efficient and safe and appropriate lighting facilities.




最适合局部照明的 聚光配光(11°)全新亮相


聚光配光可通过强有力的美丽光线，进行局部照明。
通过漂亮的阴影效果和高度的造型效果，可营造出凸显商品形状和材质的照明环境。由于中心发光强度较高，因此不管是挑高空间、VP（视觉展示），还是橱窗，本产品都能够广泛适用于各种场合。



1400TYPE 20.0W
APPAREL WHITE 3000K
10° 聚光配光

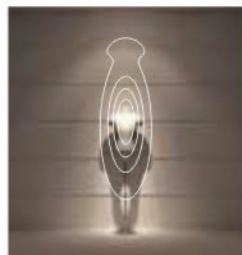


CDM-R PAR20 35W[45W]
3000K
12° 狹角配光

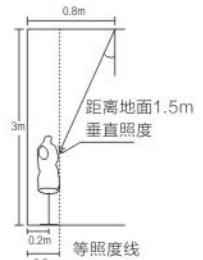

格栅射灯

我们在可配合空间和场景自由组合光源及配光的照明系统中,新加入了具有和放电灯、卤素灯（带分色镜）同等亮度的LED模块灯体组件。从而给您带来以寿命长、用电少、防紫外线 / 红外线为特征的新的照明选择机会。

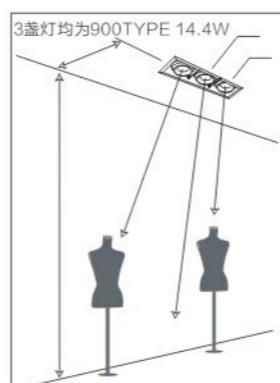

单头格栅射灯
直到现在为止，单头格栅射灯不能完全的照射出产品顶部的效果。
如果想要完全突出产品的效果，需把灯靠近产品的前面。




多个角度
调整灯的角度。从产品的正前面突出产品的整体效果，创造出绝佳没有阴影的效果。

格栅射灯系列 GRILLE LIGHT SERIES

RS-2114G-1 (20W/30W)

RS-2114G-2 (2x20W/30W)



产品特点 Product feature

Housing: Lathe aluminum + Iron

Mounting ring: Iron

Reflector: PA

LED brand: CITIZEN CREE HONGLE-HUI

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材+铁表面静电粉末喷涂处理

前环: 铁

反 射 器: PA

光源品牌: CITIZEN CREE HONGLE-HUI




驱动品牌: KGP TRIDONIC EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2114G-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114G-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114G-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114G-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm
CREE 科锐	RS-2114G-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114G-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114G-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114G-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm
HONGLE-HUI 鸿利智汇	RS-2114G-1	20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114G-1	30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114G-2	2x20W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114G-2	2x30W	Ra≥80	15° 24° 36°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm


光强分布曲线
The intensity distribution curve

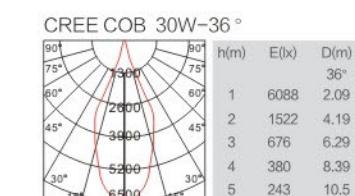

格栅射灯系列 GRILLE LIGHT SERIES

RS-2114F-1 (20W/30W)

RS-2114F-2 (2x20W/30W)

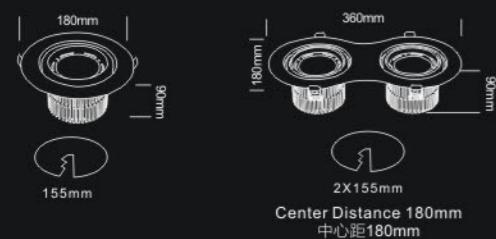

20W/30W

2x20W/30W

产品特点 Product feature

Housing: Lathe aluminum + Iron

Mounting ring: Iron

Reflector: PA

LED brand: CITIZEN CREE HONGLE

Driver brand: KGP TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材+铁表面静电粉末喷涂处理

前环: 铁

反 射 器: PA

光源品牌: CITIZEN CREE HONGLE

驱动品牌: KGP TRIDONIC EAGLERISE


输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2114F-1	20W	Ra≥80	20°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114F-1	30W	Ra≥80	20°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114F-2	2x20W	Ra≥80	20°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114F-2	2x30W	Ra≥80	20°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm
CREE 科锐	RS-2114F-1	20W	Ra≥80	20°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114F-1	30W	Ra≥80	20°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114F-2	2x20W	Ra≥80	20°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114F-2	2x30W	Ra≥80	20°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm
HONGLE 鸿利智汇	RS-2114F-1	20W	Ra≥80	20°	3000K 4000K 6000K	1800Lm 1800Lm 1800Lm
	RS-2114F-1	30W	Ra≥80	20°	3000K 4000K 6000K	2700Lm 2700Lm 2700Lm
	RS-2114F-2	2x20W	Ra≥80	20°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm
	RS-2114F-2	2x30W	Ra≥80	20°	3000K 4000K 6000K	5400Lm 5400Lm 5400Lm

光强分布曲线
The intensity distribution curve


CREE COB 30W-15°

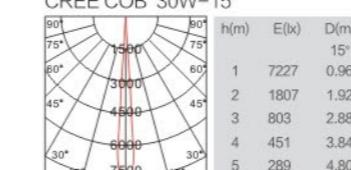

CREE COB 30W-24°

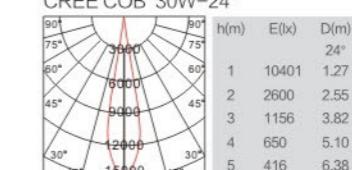


CREE COB 30W-36 °

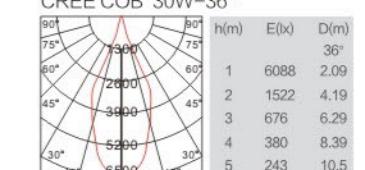

格栅射灯系列

GRILLE LIGHT SERIES

- RS-2106-1(C) (10W)**
RS-2106-2(C) (2x10W)
RS-2106-3(C) (3x10W)
RS-2108-1(C) (20W)
RS-2108-2(C) (2x20W)
RS-2108-3(C) (3x20W)

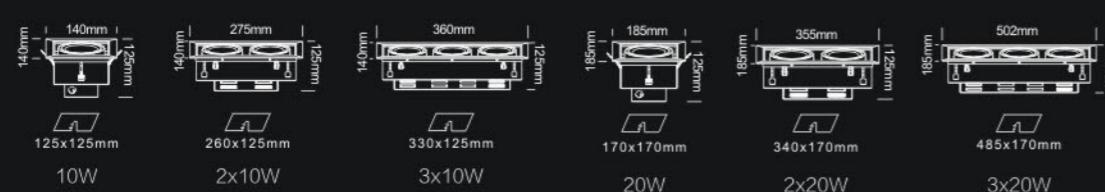

产品特点 Product feature

Housing: Lathe aluminum, powder coating
Mounting ring: Aluminum
Reflector: Aluminum
LED brand: CITIZEN CREE HONGLEI HONGLEI
Driver brand: KGP TRIDONIC EAGLERISE
Input voltage: 180-265VAC/50-60Hz


灯体外壳: 铝材表面静电粉末喷涂处理
前环: 铝
反射器: 铝
光源品牌: CITIZEN CREE HONGLEI HONGLEI
驱动品牌: KGP TRIDONIC EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2106-1(C)	10W	Ra≥80	20°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2106-2(C)	2x10W	Ra≥80	20°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2106-3(C)	3x10W	Ra≥80	20°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2108-1(C)	20W	Ra≥80	24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2108-2(C)	2x20W	Ra≥80	24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2108-3(C)	3x20W	Ra≥80	24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
CREE 科锐	RS-2106-1(C)	10W	Ra≥80	20°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2106-2(C)	2x10W	Ra≥80	20°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2106-3(C)	3x10W	Ra≥80	20°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2108-1(C)	20W	Ra≥80	24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2108-2(C)	2x20W	Ra≥80	24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2108-3(C)	3x20W	Ra≥80	24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm
	RS-2106-1(C)	10W	Ra≥80	20°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2106-2(C)	2x10W	Ra≥80	20°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2106-3(C)	3x10W	Ra≥80	20°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
	RS-2108-1(C)	20W	Ra≥80	24° 36°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2108-2(C)	2x20W	Ra≥80	24° 36°	3000K 4000K 6000K	3200Lm 3200Lm 3200Lm
	RS-2108-3(C)	3x20W	Ra≥80	24° 36°	3000K 4000K 6000K	4800Lm 4800Lm 4800Lm


光强分布曲线
The intensity distribution curve

CREE COB 20W-24°



格栅射灯系列
GRILLE LIGHT SERIES

RS-2115C (45W)



产品特点
Product feature

Housing: Die-casting aluminum alloy, Powder coating

Mounting ring: Aluminum

Reflector: Aluminum

LED brand: HONGLEI-HLJ 鸿利智汇

Driver brand: KGP 科普光谱 TRIDONIC EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝材表面静电粉末喷涂处理

前环: 铝

反 射 器: 铝

光源品牌: HONGLEI-HLJ 鸿利智汇

驱动品牌: KGP 科普光谱 TRIDONIC EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
鸿利智汇	RS-2115C	45W	Ra≥80	90°	3000K 4000K 6000K	3600Lm 3600Lm 3600Lm





LED Surface mounted downLight Series

COB光源，散热效果更好，比常规LED贴片或者灯珠，更亮更省电，寿命更长久；灯体材质经亮漆工艺处理，灯具抗腐蚀，长久耐用，经阳极氧化处理；设计超厚优质散热器，散热片均衡有序，散热效果突出，更加有效保护灯珠正常工作，延长光源使用寿命。

COB light source, better heat dissipation effect, brighter and more energy-saving than conventional LED patches or lamp beads, and longer life; The lamp body material is treated by lacquer process, the lamp is corrosion resistant, durable and anodized; the design is super thick The heat sink, the heat sink is balanced and orderly, and the heat dissipation effect is outstanding, which is more effective in protecting the lamp bead from working normally and extending the light. Source life.



高显色性的光

产品采用COB芯片。
显色性高，表现出以前LED很难表现出的鲜明的颜色。
高功率和高显色的灯光下，强调了照射物的素材感，能完美再现物体色泽与人体肤色。
是精品商店与重要社交活动场所需要的理想的光。

High Color Rendering Index

Selecting high CRI LED , it creates an comfortable lighting environment. High color rendering index of product is suitable for color reproduction for high places, such as jewelry shop, clothing stores and so on. High color can make the product showing the original color, showing eye-catching colors ,so that customers are more willing to pay higher than normal price to buy goods.




明装筒灯系列 SURFACE MOUNTED DOWNLIGHT SERIES

RS-2605A (15W)

RS-2605B (20W)

RS-2605C (30W)

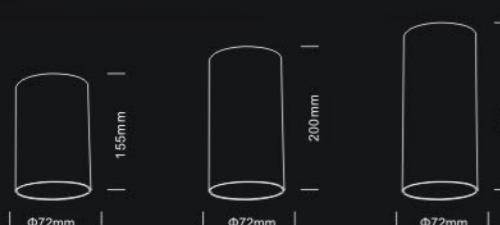

产品特点 Product feature

Housing: Lathe aluminum,powder coating

Mounting ring: PC

Reflector: PA

LED brand: CITIZEN CREE HONGLI

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反 射 器: PA

光源品牌: CITIZEN CREE HONGLI



驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

	光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2605A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2605B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2605C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	RS-2605A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2605B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2605C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLI 鸿利智汇	RS-2605A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2605B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2605C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve

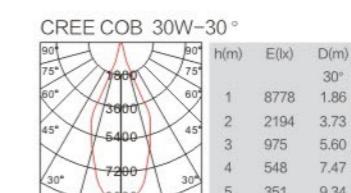


明装筒灯系列 SURFACE MOUNTED DOWNLIGHT SERIES

RS-2606A (10W)

RS-2606B (20W)

RS-2606C (30W)

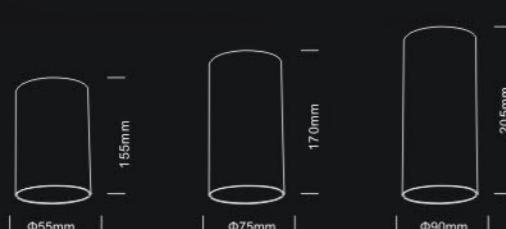

可选配件/Optional accessories



黑色 Black 白色 White 金色 Gold

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: PC

Reflector: PC

LED brand: CITIZEN CREE HONGLI

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: PC

反 射 器: PC



光源品牌: CITIZEN CREE HONGLI

驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

	光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2606A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm	800Lm 800Lm 800Lm
	RS-2606B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm	1600Lm 1600Lm 1600Lm
	RS-2606C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm	2400Lm 2400Lm 2400Lm
CREE 科锐	RS-2606A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm	800Lm 800Lm 800Lm
	RS-2606B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm	1600Lm 1600Lm 1600Lm
	RS-2606C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm	2400Lm 2400Lm 2400Lm
HONGLI 鸿利智汇	RS-2606A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm	800Lm 800Lm 800Lm
	RS-2606B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm	1600Lm 1600Lm 1600Lm
	RS-2606C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve



LED Hanging Light Series

COB光源，散热效果更好，比常规LED贴片或者灯珠，更亮更省电，寿命更长久；灯体材质经亮漆工艺处理，灯具抗腐蚀，长久耐用，经阳极氧化处理；设计超厚优质散热器，散热片均衡有序，散热效果突出，更加有效保护灯珠正常工作，延长光源使用寿命。

COB light source, better heat dissipation effect, brighter and more energy-saving than conventional LED patches or lamp beads, and longer life; The lamp body material is treated by lacquer process, the lamp is corrosion resistant, durable and anodized; the design is super thick The heat sink, the heat sink is balanced and orderly, and the heat dissipation effect is outstanding, which is more effective in protecting the lamp bead from working normally and extending the light. Source life.



● 产品特点 Characteristic:

- 灯体采用优质高端铝材，全角度的设计理念，大气时尚，欧洲级工艺水准，世界级的品质标准；
- 反光杯采用优质纯铝旋压成型，阳极氧化工艺，专业二次光学设计，保证了严苛的光视角控制，光斑完美，抛物线曲面设计，投射效果更好，能更有效的降低光损；
- 采用新一代优质COB大尺寸芯片，高端封装工艺，顶级品质；光色稳定，亮度更高，光眩均匀；
- 采用恒流驱动，质量更稳定，使用寿命更长，光线无频闪，保护眼睛视力；
- The lamp body is made of aerospace Precision aluminum, the atmosphere among the European level, process level, world class quality standards;
- Reflector imported pure aluminum molding, anodic oxidation process, the two optical design, to ensure angle control, perfect spot, parabolic surface design, projection effect is better, can effectively reduce the light loss;
- Adopt new generation of imported COB chip size, high-end packaging technology, top quality; color stability, high brightness, uniform light.
- Adopt constant current drive, more stable quality, long service life, light, no flicker, protect the eyes

吸顶线条灯系列 CEILING LINE LIGHT SERIES

RS-2630CD (30W)


RS-2640CD (40W)

RS-2650CD (50W)

RS-2660CD (60W)



可选反光杯颜色/Optional reflector color

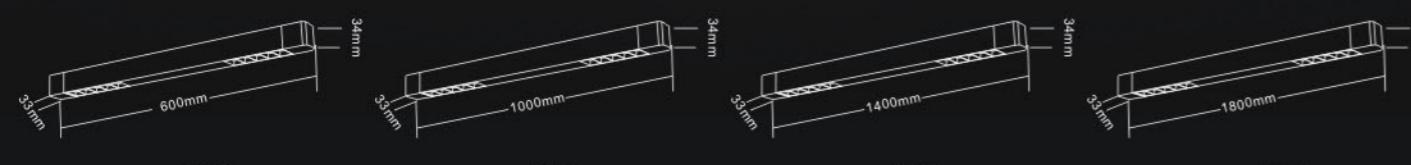白色
White金色
Gold

30W

40W

50W

60W

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLUX

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONGLUX

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	RS-2630CD	30W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	2400Lm 2400Lm 2640Lm
	RS-2640CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2650CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4000Lm 4000Lm 4400Lm
	RS-2660CD	60W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm
	RS-2630CD	30W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	2400Lm 2400Lm 2640Lm
	RS-2640CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2650CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4000Lm 4000Lm 4400Lm
	RS-2660CD	60W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm

吊线灯系列 HANGING LIGHT SERIES

RS-2315C (15W)
RS-2330C (30W)
RS-2345C (45W)
RS-2360C (60W)



可选反光杯颜色/Optional reflector color

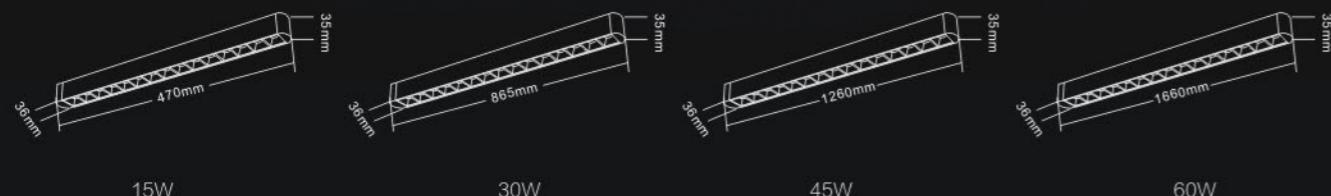白色
White金色
Gold

15W

30W

45W

60W

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLISHI

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONGLISHI

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数 Product Parameter


光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	RS-2315C	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	RS-2330C	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	RS-2345C	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm
	RS-2360C	60W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	4400Lm 4400Lm 4800Lm
	RS-2315C	15W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	1100Lm 1100Lm 1200Lm
	RS-2330C	30W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	2200Lm 2200Lm 2400Lm
	RS-2345C	45W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3300Lm 3300Lm 3600Lm
	RS-2360C	60W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	4400Lm 4400Lm 4800Lm

吊线灯系列 HANGING LIGHT SERIES

RS-2330CD (30W)
RS-2340CD (40W)
RS-2350CD (50W)
RS-2360CD (60W)



可选反光杯颜色/Optional reflector color

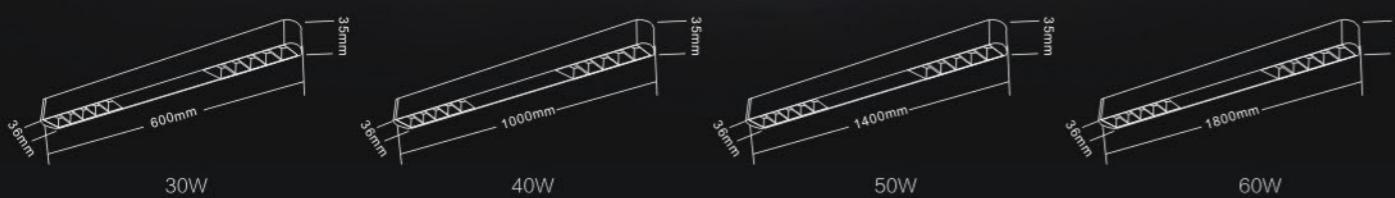白色
White金色
Gold

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONGLUX

Driver brand: Driver on board

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONGLUX

驱动品牌: AC LED

输入电压: 220~240VAC/50~60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	RS-2330CD	30W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	2400Lm 2400Lm 2640Lm
	RS-2340CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2350CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4000Lm 4000Lm 4400Lm
	RS-2360CD	60W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm
	RS-2330CD	30W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	2400Lm 2400Lm 2640Lm
	RS-2340CD	40W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2350CD	50W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4000Lm 4000Lm 4400Lm
	RS-2360CD	60W	Ra≥80	两边15° 30° 45° 中间100° L&R15° 30° 45° intermediate100°	3000K 4000K 6000K	4800Lm 4800Lm 5300Lm



吊线灯系列
HANGING LIGHT SERIES

RS-2351 (50W)

RS-2350 (100W)



可选反光杯颜色/Optional reflector color

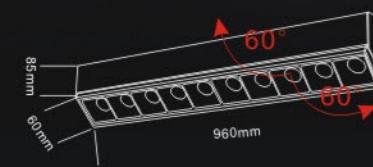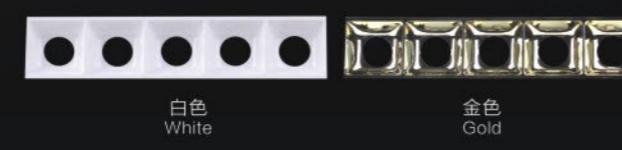

产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONCLITECH

Driver brand: KGP EAGLERISE

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

反射器: PC

光源品牌: BRIDGELUX HONCLITECH

驱动品牌: KGP EAGLERISE

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	RS-2351	50W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3500Lm 3500Lm 3850Lm
	RS-2350	100W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	7600Lm 7600Lm 8400Lm
	RS-2351	50W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	3500Lm 3500Lm 3850Lm
	RS-2350	100W	Ra≥80	15° 30° 45°	3000K 4000K 6000K	7600Lm 7600Lm 8400Lm



吊线灯系列
HANGING LIGHT SERIES

RS-2341 (40W)

RS-2340 (80W)



产品特点
Product feature

Housing: Lathe aluminum, powder coating

Reflector: PC

LED brand: BRIDGELUX HONCLIGHT 鸿利智汇

Driver brand: KGP 鸿运吉品 EAGLERISE

Input voltage: 220~240VAC/50~60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

反 射 器: PC

光源品牌: BRIDGELUX HONCLIGHT 鸿利智汇

驱动品牌: KGP 鸿运吉品 EAGLERISE

输入电压: 220~240VAC/50~60Hz

产品参数
Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
	RS-2341	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2340	80W	Ra≥80	100°	3000K 4000K 6000K	7200Lm 7200Lm 8000Lm
	RS-2341	40W	Ra≥80	100°	3000K 4000K 6000K	3200Lm 3200Lm 3500Lm
	RS-2340	80W	Ra≥80	100°	3000K 4000K 6000K	7200Lm 7200Lm 8000Lm



吊线灯系列 HANGING LIGHT SERIES

RS-2305A (15W)
RS-2305B (20W)
RS-2305C (30W)



15W 20W 30W

产品特点 Product feature



Housing: Lathe aluminum, powder coating
Mounting ring: PC
Reflector: PA
LED brand: CITIZEN CREE HONGLE智汇
Driver brand: KGP 鸿客派 EAGLCRISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理
前环: PC
反 射 器: PA
光源品牌: CITIZEN CREE HONGLE智汇
驱动品牌: KGP 鸿客派 EAGLCRISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2305A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2305B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2305C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	RS-2305A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2305B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2305C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLE智汇	RS-2305A	15W	Ra≥80	30° 45°	3000K 4000K 6000K	1200Lm 1200Lm 1200Lm
	RS-2305B	20W	Ra≥80	30° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2305C	30W	Ra≥80	30° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve



吊线灯系列 HANGING LIGHT SERIES

RS-2306A (10W)
RS-2306B (20W)
RS-2306C (30W)



可选配件/Optional accessories



15W 20W 30W



黑色 Black 白色 White 金色 Gold

产品特点 Product feature



Housing: Lathe aluminum, powder coating
Mounting ring: PC
Reflector: PC
LED brand: CITIZEN CREE HONGLEI
Driver brand: KGP EAGLERISE
Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理
前环: PC
反射器: PC
光源品牌: CITIZEN CREE HONGLEI
驱动品牌: KGP EAGLERISE
输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2306A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2306B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2306C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	RS-2306A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2306B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2306C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLEI 鸿利智汇	RS-2306A	10W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2306B	20W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2306C	30W	Ra≥80	15° 24° 36° 45° 60°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve




吊线灯系列 HANGING LIGHT SERIES

RS-2318 (10W)

RS-2319 (20W)

RS-2320 (30W)

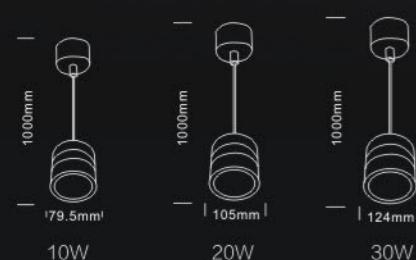

产品特点 Product feature

Housing: Lathe aluminum, powder coating

Mounting ring: Aluminum

Reflector: Aluminum

LED brand: CITIZEN CREE HONGLI

Driver brand: KGP EAGLERISE

Input voltage: 180-265VAC/50-60Hz

灯体外壳: 铝型材表面静电粉末喷涂处理

前环: 铝

反 射 器: 铝

光源品牌: CITIZEN CREE HONGLI

驱动品牌: KGP EAGLERISE

输入电压: 180-265VAC/50-60Hz

产品参数 Product Parameter

光源 Source	型号 Model	LED功率 LED Power	CRI	反射罩角度 Beam Angle	色温 CCT	光通量 Luminous Flux
CITIZEN 西铁城	RS-2318	10W	Ra≥80	36° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2319	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2320	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
CREE 科锐	RS-2318	10W	Ra≥80	36° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2319	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2320	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm
HONGLI 鸿利智汇	RS-2318	10W	Ra≥80	36° 45°	3000K 4000K 6000K	800Lm 800Lm 800Lm
	RS-2319	20W	Ra≥80	36° 45°	3000K 4000K 6000K	1600Lm 1600Lm 1600Lm
	RS-2320	30W	Ra≥80	36° 45°	3000K 4000K 6000K	2400Lm 2400Lm 2400Lm

光强分布曲线
The intensity distribution curve

