



NewFeelling

Video Light



NF-CX300/200


Total power: 300W/200W
 Input voltage: AC110-260V, 50-60HZ
 Light source LED: COB1P*200W/1P*300W
 Color temperature: 3100±150K/5600±200K (choose one)
 Service life: 50000H
 Channel mode: 2CH channel
 Control mode: DMX / manual
 Luminous angle: 19-50 degrees (stepless adjustment)
 Color rendering index: CRI95
 Display: LCD display
 Signal input and output: three-core and five-core card socket
 Power socket: Power input / output
 Protection level: IP25
 Optical: HD optics 19°~50°
 Size: 540*170*160mm
 Net weight: 9kg
 Gross weight: 10kg



channel

CH	1	2
%	dimming	Bit dimming
100%	[Bar chart showing 100% dimming]	255
75%		[Bar chart showing bit dimming]
50%		
25%		
0%	0	

Lux chart

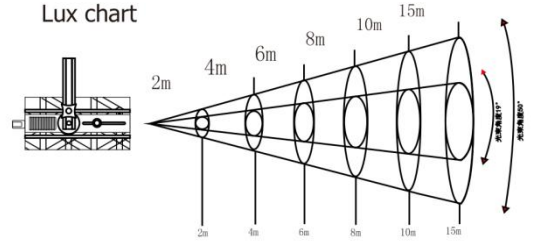

Center Lux	5600K	15730	4210	1890	1240	1000	860	beam angle 19°
Center Lux	3200K	14000	3710	1660	1060	800	480	
Spot diameter/cm		70	130	190	235	280	385	
Center Lux	5600K	11800	3600	1690	1100	850	840	beam angle 50°
Center Lux	3200K	10300	3150	1460	930	650	460	
Spot diameter/cm		120	235	340	440	530	700	



NF-JG200B


Total power: 200W
 Input voltage: AC110-260V, 50-60HZ
 Light source LED: COB1P*200W/1P*300W
 Color temperature: 3100±150K/5600±200K (choose one)
 Service life: 50000H
 Channel mode: 4CH channel
 Control mode: DMX / manual
 Luminous angle: 25-50 degrees (electronic focusing)
 Color rendering index: CRI 95%
 Display: LCD display
 Signal input and output: three-core and five-core card socket
 Power socket: Power input / output
 Protection level: IP25
 Optical: HD Optical
 Size: 370*190*200mm
 Net weight: 6.5kg
 Gross weight: 7kg



channel

CH	1	2	3	4
%	dimming	STRO BE	STRO BE	HEAT POSITION
100%	[Bar chart showing 100% dimming]	255	255	100%
75%		[Bar chart showing strobe]		75%
50%				50%
25%				25%
0%	0	0	0	0%

Lux chart

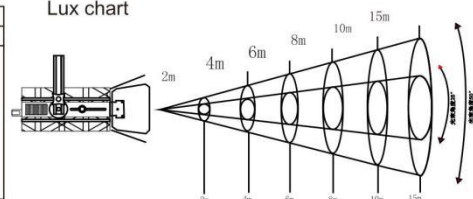

Center Lux	5600K	16100	3800	2080	1220	530	150	beam angle 25°
Center Lux	3200K	10730	3600	1680	920	450	110	
Spot diameter/cm		100	170	240	310	390	510	
Center Lux	5600K	3200	1200	700	300	160	100	beam angle 50°
Center Lux	3200K	2600	760	340	220	110	80	
Spot diameter/cm		200	350	570	770	990	1540	



NF-CZ310/370

310W/370W Auto Show Light


Total power: 310W/370W
 Input voltage: AC110-260V, 50-60HZ
 Light source: LED10W*31P/10W*37P imported lamp beads
 Color temperature: 3200K/4500K/6800K (optional monochrome temperature)
 Service life: 50000H
 Channel mode: 2CH channel
 Control mode: DMX / manual
 Luminous angle: 15 degrees / 25 degrees
 Color rendering index: CRI90%
 Display: LED digital screen
 Signal input and output: three-core and five-core card socket
 Power socket: Power input / output
 Protection level: IP25
 Optical: PMMA
 Size: 350*250*250mm
 Net weight: 6.5kg
 Gross weight: 7kg



channel

CH	1	2
%	Switch	STROBE
100%		
75%		
50%		
25%		
0%		

Lux chart

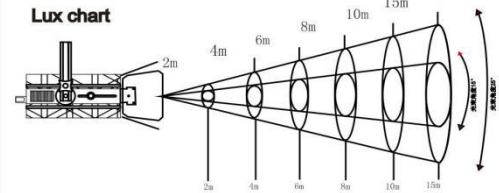

Center Lux	6800K	90700	23800	11400	6700	5280	3280	beam angle15°
Center Lux	3200K	8900	22900	11000	6200	4900	3000	
Spot diameter/cm		60	110	180	230	280	400	
Center Lux	6800K	39800	11500	5350	3470	2670	1700	beam angle25°
Center Lux	3200K	38800	10400	4850	2970	2370	1570	
Spot diameter/cm		80	150	230	280	340	450	



NF-CZ310/370

200W Movies Light

Total power: 200W
 Input voltage: AC110-260V, 50-60HZ
 Light source LED: 0.5W*216P cool white +0.5W*216 warm white
 Color temperature: 3100±150K/5600±200K (optional monochrome temperature)
 Service life: 50000H
 Channel mode: 4CH channel
 Control mode: DMX / manual
 Luminous angle: 120 degrees
 Color rendering index: CRI95%
 Display: LED digital screen
 Signal input and output: three-core and five-core card socket
 Power socket: Power input / output
 Protection level: IP25
 Optical: HD Optical
 Size: 490*310*105mm
 Net weight: 7kg
 Gross weight: 8kg



3200k/5600k

CH	1	2
%	DIMMING	STROBE
100%		
75%		
50%		
25%		
0%		

3200k~5600k

CH	1	2	3	4			
%	switch	YELLOW	WHITE	STRO BE			
100%							
75%					255	255	255
50%					DIM4	DIM4	DIM4
25%					192	192	192
0%					DIM3	DIM3	DIM3
	DIM2	DIM2	DIM2				
	128	128	128				
	DIM1	DIM1	DIM1				
	64	64	64				
	DIM1	DIM1	DIM1				
	0	0	0				



NF-CZ310/370

300W ELECTRONIC ZOOM FOCUS LAMP

Total power: 300W

Input voltage: AC110-260V, 50-60HZ

Light source LED: COB1P*300W (monochrome / two-color)

Color temperature: 3200/5600

monochrome temperature)

Service life: 50000H

Channel mode: 4CH channel

Control mode: DMX / manual

Luminous angle: 25-60 degrees

Color rendering index: CRI95%

Display: LED digital screen

Signal input and output: three-core and five-core card socket

Power socket: Power input / output

Protection level: IP25

Size: 380*200*250mm

Net weight: 6kg

Gross weight: 7k

